

## PERFORMANCE/FEATURES

- 30-45 CFM and Up to 150 PSI
- Lightweight - Only 195 lbs
- 12V and 24V DC Models Available

## ENCAPSULATED AIR COMPRESSOR

- Rotary Screw Air Compressor
- Bolt-On Electric Inlet Valve
- Integral Air-to-Oil Separator Tank
- Lifetime Warranty on Air End

## AIR-TO-OIL COOLER

- Capable of Cooling Up to 175 PSI
- Ambient Operating Range of -20 °F to + 125 °F

## HYDRAULIC COOLER

- Integrated Cooler Reduces Heat in Truck Hydraulic System

## HYDRAULICS

- Gear-Type Motor
- Hydraulic Oil In - 3/4" 37 Degree JIC (#12)
- Hydraulic Oil Out - 1" 37 Degree JIC (#16)
- Open Center or Closed Center
- Hydraulic Case Drain - 3/8" 37 Degree JIC (#6)
- Hydraulic Load Sense Line - 1/4" 37 Degree JIC (#4)\*

## INSTRUMENTATION

- Conveniently Located and Easy to Read or Remote Mountable
- LED Electronic Display for Temperature, Pressure, and Machine Hours

## SAFETY EQUIPMENT

- Air Pressure Relief Safety Valve
- Hydraulic Oil Pressure Relief Valve
- Automatic Blow-Down on Shutdown
- High-Temperature and High-Pressure Shutdown
- Oil Fill Plug Safety Relief

## SERVICEABILITY/CONVENIENCE

- Reversible Hinged Hood and Oil Fill Service
- Access Panel for Easy Accessibility
- JIC Fittings on Front of Machine for Hydraulic and Air Connections for Convenience

## CANOPY

- Lightweight Powder-Coated Aluminum Sheet Metal Enclosure
- Single Point Lifting Bail




\*Load sense line for closed center hydraulic system only.

## HYDRAULIC SYSTEM REQUIREMENTS

All hydraulic ratings and pressures are at the machine and do not take into account the pressure drops of individual hydraulic systems. These pressure drops need to be taken into account and added to the rating of the hydraulic pump and components. Vanair highly recommends consulting a hydraulic supply expert for specifying the correct hydraulic pump size and type, oil reservoir size, hydraulic cooler, hydraulic pressure relief, and other hydraulic supply components for your application. Please take into consideration the following: The hydraulic flow and pressure requirements of the air compressor, the continuous hydraulic load when the compressor is running, the duty cycle and ambient operating temperatures, and any other hydraulic equipment that may share the same hydraulic supply system (Vanair recommends a dedicated pump and hydraulic circuit).

## OPTIONS/ACCESSORIES

- Cold Weather Package with Thermal Valve
- 20 - 60 Gallon Air Reservoirs
- Aftercoolers
- Air Hoses
- Air Tools
- Hose Reels and Fittings
- OSHA Safety Valve (Velocity Fuse)
- Service/Control Line Moisture Separators
- Tool Oiler/Lubricator
- Service Airline De-Icer
- Filter Regulator Lubricator (FRL) 1/2"

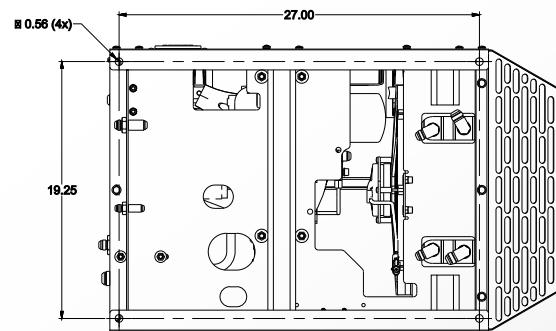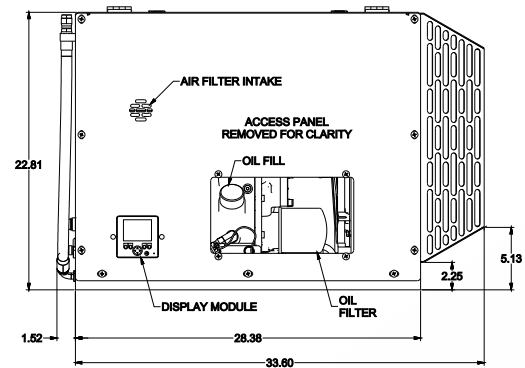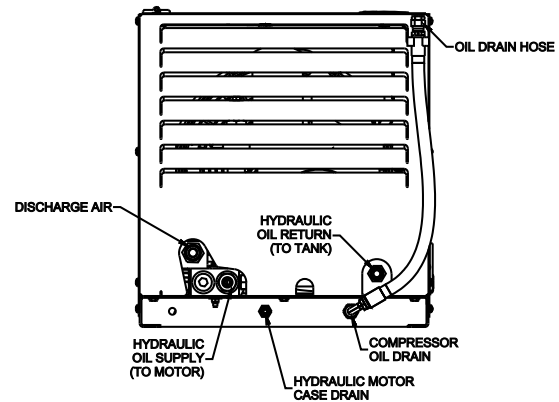

Bottom view with mounting pattern