

600U/T

Steel Dump Body


Lighter weight Crossmemberless design for
Greater Payloads and Increased Revenue



Dump Body



Shown with 9 panel tailgate and barn door options.

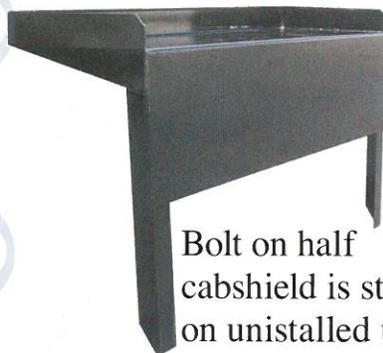

Bolt on half cabshield is standard on uninstalled units

The Godwin 600U/T series body features a weight saving smooth crossmemberless understructure, a shock absorbing rubber cushioned mount, and a durable AR 450 steel floor with 12" radius corners for cleaner dumping. There are enough length, side height and material options to suit your specific needs. A zinc powder coat primer under powder coat topcoat, and half cabshield are standard features.

Visit Godwin
Manufacturing online
www.godwinmfg.com



Specifications:

Body lengths from 14' to 20' in 6" increments
Side Heights 42", 48", 54" and 60"

FLOOR:

3/16" AR 450 one-piece floor with 60" wide flat surface before 12" radius to sides.

SIDES:

One piece 10 gauge 50K minimum yield with fully boxed top rails, material shedding lower rails, full depth rear posts, ladders and grab handles both side and front, continuous weld.

UNDERSTRUCTURE:

Crossmemberless design with 3/16" formed trapezoid longitudinal members with rubber cushion in formed track.

FRONT WALL:

10 gauge 50K minimum yield steel with horizontal formed inverted "V" reinforcements.

TAILGATE:

Three panel 10 gauge 50K minimum yield steel with full Perimeter bracing and two intermediate horizontal braces continuous weld.

TAILGATE HARDWARE:

Heavy duty cast steel upward acting top hardware with air operated adjustable cast steel overshot lower hardware and spreader chains. Banjo eyes near bottom of gate control opening you select.

LIGHTING:

FMVSS 108 required lights and reflectors. L.E.D. lights are recessed and rubber grommet mounted.

OPTIONS:


- 1/4" AR 450 floor in lieu of 3/16"
- 1/4" AR 450 sides
- 3/16" 50K minimum yield steel sides, front and gate
- 3/16" AR 450 sides and gate
- Air high lift or two-way barn door tailgate



Above is the 600U/T's crossmemberless understructure and formed long sills with rubber cushion.



Optional air operated high lift tailgate with other options shown.

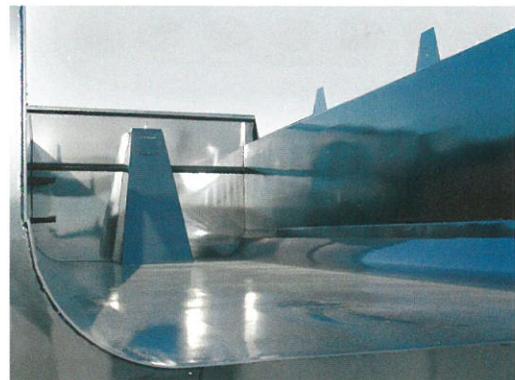

Shown is the inside of the 600U/T body and 12" floor to side radius.

FREIGHT NOT
INCLUDED IN
PRICE OF UNIT.
FREIGHT WILL
BE BILLED UPON
PURCHASE.