

TECHNICAL SPECIFICATION

ANTHEM 84T DAYCAB



			WEIGHT (LB)	
APPLICATION PACKAGES		DESCRIPTION	FRONT	REAR
MPK1AK	CHASSIS CONFIGURATION PACKAGE	ONEBOX EATS, LH BATTERY BOX (4 BATTERIES), 11.8 GALLON (45L) DEF, SINGLE 26" LH FUEL TANK	0	0

				WEIGHT (LB)	
CUSTOMER/VEHICLE INFO			DESCRIPTION	FRONT	REAR
S	002GT2	CHASSIS (BASE MODEL)	ANTHEM 84T DAYCAB	10,133	3,682
S	99X93X	ASSEMBLY PLANT	Made in Macungie, PA USA	0	0
	MP2001	CUSTOMER FLEET SIZE	DEALER FLEET WITH LESS THAN 25 VEHICLES IN OWN FLEET OF ANY VEHICLE BRAND	0	0
S	013001	TYPE OF SERVICE	COMMERCIAL	0	0
S	M98018	WARRANTY REGISTRATION LOCATION	USA - WARRANTY REGISTRATION LOCATION	0	0
	MBT01T	EMISSION WARRANTY CERTIFICATION	EPA (only) for Mack MP7 / MP8 Diesel	0	0
S	5050B5	INITIAL REGISTRATION LOCATION	USA REGISTRATION	0	0
S	534014	LANGUAGE-PUBS/DECAL/SIGNS	ENGLISH	0	0
S	DHX10X	ROAD CONDITION	WELL MAINTAINED SURFACED ROADS >95% DRIVING DISTANCE	0	0
	005005	VEHICLE USE & BODY/TRAILER TYPE	VAN TRAILER	0	0
S	78XB1X	TRANSPORT CYCLE	LOCAL DISTRIBUTION	0	0
S	DKXG2X	GROSS COMBINATION WEIGHT (CA in PC29 only)	80,000 LB (36 TONNES) GROSS COMBINATION WEIGHT	0	0
S	70BC1X	BRAKE REGULATION	BRAKE REGULATION, STOPPING DISTANCE 76M (250FT)	0	0
	QCXA1X	TOPOGRAPHY	GRADES <3% GREATER THAN 98% OF DRIVING DISTANCE MAX GRADE 8%	0	0
S	E1BD1X	AMBIENT TEMP UPPER LIMIT (GTA)	AMBIENT TEMPERATURE HOT. WARMER THAN 104 F (40 C) ALLOWED UP TO 25 HOURS PER YEAR	0	0
S	032A79	OPERATING TERRAIN GRADE CONDITIONS	ON HIGHWAY, STARTING GRADES<16%	0	0
S	033A10	LOADING SURFACE FACTOR	CONCRETE LOADING AND / OR UNLOADING SURFACE	0	0
	0341A1	VEHICLE VOCATION	LINEHAUL / LONG HAUL SERVICE	0	0

				WEIGHT (LB)	
ENGINE/TRANSMISSIONS			DESCRIPTION	FRONT	REAR
S	1004M0	ENGINE PACKAGE, COMBUSTION	MP7-345C MACK 345HP @ 1500-1700 RPM (PEAK) 1950 RPM (GOV) 1350 LB-FT, US'21	2,549	-231
S	Q1CA1X	GEAR SELECTION TUNING	BASIC, GEAR-SELECTION TUNING	0	0
S	3GCA1X	GHG APPLICATION, VEHICLE	GREEN HOUSE GAS HIGHWAY APPLICATION	0	0
	136AD3	TRANSMISSION	FULLER FRO-16210C (12.69/0.74)	530	177
S	V4EZ9X	GEARBOX 12TH GEAR LOCK-OUT	WITHOUT 12TH GEARBOX GEAR LOCK-OUT	0	0

				WEIGHT (LB)	
EXHAUST/EMISSIONS		DESCRIPTION		FRONT	REAR
S	CIRAA2	CARB 2008 IDLE REGULATION	IDLE EMISSION CERTIFICATION, BASIC	0	0
	DPF04F	DPF DIESEL PARTICULATE FILTER	CLEARTECH ONE BOX E.A.T.S. RH SIDE UNDER CAB US17 / US21	0	0
	MCF01F	CHASSIS MOUNTED EMISSIONS FINISH	PAINTED DEF & DPF COVER	0	0
	DF10M1	DIESEL EXHAUST FLUID TANK	11.8 GALLON (45 L) 22" LEFT SIDE FRAME MOUNTED	146	34
	6MDA1X	AD-BLUE TANK VENTILATION FILTER	DEF TANK VENTILATION FILTER	0	3

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
EXHAUST/EMISSIONS		DESCRIPTION		FRONT	REAR
S	130AB9	EXHAUST	SINGLE VERTICAL RIGHT SIDE INBOARD MOUNTED STRAIGHT EXHAUST STACK TURNED OUT	-4	-4
	KRXB5X	EXHAUST STACK HEIGHT	11' 6" FROM GROUND	0	0
S	Q0AA1X	EXHAUST SYSTEM MATERIAL FINISH	W/O BRIGHT FINISH EXHAUST	0	0
	78ADCX	EMISSION ON BOARD DIAG CONTROL	EMISSION OBD, DISPLAY ONLY, USA2023	0	0

				WEIGHT (LB)	
ENGINE EQUIPMENT		DESCRIPTION		FRONT	REAR
	125045	AIR CLEANER	UNDER HOOD SINGLE ELEMENT DRY TYPE W/AIR INTAKE FROM BOTH SIDES OF HOOD	0	0
S	121AA5	BUG SCREEN	BLACK ALUMINUM BUG SCREEN MOUNTED BEHIND GRILLE, WITHOUT WINTER FRONT COVER	0	0
S	1130G3	AIR COMPRESSOR/DRYER	WABCO HEATED SS-HP AIR DRYER W/ WABCO 636 (37.4 CFM) AIR COMPRESSOR	0	0
S	KOXA1X	AIR DRYER POSITION (CA)	AIR DRYER POSITION STANDARD	0	0
S	132AB9	ALTERNATOR	DELCO 12V 160A (28SI) BRUSH-TYPE	16	0
S	316AA6	BATTERIES	(3) MACK 12V 650/1950 CCA THREADED STUD TYPE	0	0
S	393AC3	BATTERY BOX - MOUNTING (x)	LH RAIL UNDER CAB, PARALLEL TO FRAME W/STEPS, W/AIR RESERVOIR MOUNTED BELOW (4 BATTERY MAX)	0	0
	L5XA1X	BATTERY BOX COVER	MOLDED PLASTIC	0	0
S	NCXA5X	STARTER MOTOR	12 VOLT DELCO 39MT-MXT	31	0
	110AA5	ENGINE BRAKE	MACK MP7 POWERLEASH	0	0
S	JMXB1X	ENGINE BRAKE LIGHTING (CA)	VEHICLE AND TRAILER (IF APPLICABLE) STOP LAMPS ACTIVATE UPON SERVICE BRAKE APPLICATION ONLY(3899000)	0	0
S	118AB8	FAN DRIVE	BEHR FAN AND ELECTRONIC MODULATING VISCOUS FAN DRIVE	0	0
S	119AI9	COOLANT PROTECTION	ETHYLENE GLYCOL FULLY FORMULATED COOLANT (50/50 MIX DYED PINK) TO -34DEG, W/ FILTER	0	0
S	124AA3	HOSES - RADIATOR/HEATER	MACK EPDM RADIATOR & HEATER HOSES	0	0
S	293043	FUEL-WATER SEPARATOR	MACK W/MANUAL DRAIN VALVE V2 (INTEGRAL W/ PRIMARY FUEL FILTER)	0	0
S	MBXA1X	PRIMARY FUEL FILTER POSITION (CA)	STANDARD FUEL FILTER POSITION	0	0
S	MCA04A	ENGINE HEATERS	120v 1500w BLOCK HEATER ONLY (120V-15A PLUG)	0	0
	5NXA1X	ENGINE BLOCK HEATER	120V 1500W ENGINE BLOCK HEATER	5	0
S	QHXC1X	OIL SUMP	OIL PAN	0	0
S	36AA1X	TETHER DEV PKG, CAPS & COVERS	FURNISH CAP RETAINER FOR OIL FILL & RADIATOR OVERFLOW TANK	0	0
S	2YBZ1X	ENGINE STOP, EMERGENCY (CA in PC29 only)	WITHOUT ENGINE STOP, EMERGENCY	0	0

				WEIGHT (LB)	
CLUTCH/TRANS EQUIPMENT		DESCRIPTION		FRONT	REAR
	492032	GEAR SHIFTER	EATON/FULLER SHIFTER	0	0
	133AD1	CLUTCH	EATON ADVANTAGE EZ-PEDAL 9-SPRING,2PLATE 15.5" CERAMIC 6 PADDLES, MANUAL ADJUST	5	0
	MCB04B	CLUTCH ACTUATION SYSTEM & PEDAL PAD	MECHANICAL CLUTCH CABLE SYSTEM WITH RUBBER PEDAL	0	0
	2XAB1X	CLUTCH PEDAL PAD	RUBBER PAD	3	0
	1950J5	DRIVELINE - MAIN	SPICER SPL250HDXL LITE - LARGE (PROPS-L)	47	47
	204044	DRIVELINE - INTERAXLE	SPICER SPL170XL "LITE SERIES"	0	0
S	76AA1X	PROPELLR SHAFT MAIN, UNVSL JNT	UNIVERSAL JOINT HALF-ROUND TYPE	0	0
S	8WAAAX	PROP SHAFT INTERAXL UNIV JOINT	HALF-ROUND UNIVERSAL JOINT	0	0

PRICELIST DATE

20230205

QUOTATION

BLAN2022000174C626

DATE

4/20/2023

PAGE

2 of 12

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
CLUTCH/TRANS EQUIPMENT		DESCRIPTION		FRONT	REAR
S	4LDA1X	TRANSMISSION OUTPUT TORQUE	TRANSMISSION OUTPUT TORQUE BASIC	0	0
S	RCXB1X	BELL HOUSING	ALUMINUM	0	0
S	7RXB1X	LUBRICANTS, TRANSMISSION	SYNTHETIC OIL IN TRANSMISSION	0	0
	139AA2	TRANSMISSION OIL COOLER	TRANS OIL COOLER (INTEGRAL OIL PUMP)	45	3

				WEIGHT (LB)	
FRONT AXLE EQUIPMENT		DESCRIPTION		FRONT	REAR
S	240AA6	FRONT AXLE	12000# (5400 KG) MACK FXL12 STRAIGHT SPINDLE/UNITIZED BEARINGS	0	0
S	244AB2	SPRINGS - FRONT	MACK TAPERLEAF HD 12000# (5400 KG) GROUND LOAD RATING, EQUAL BIAS	0	0
S	YNX99X	FRONT STABILIZER	WITHOUT FRONT STABILIZER	0	0
S	2410A1	FRONT AXLE BRAKES	MERITOR "S" CAM TYPE 16.5" x 5" Q+	16	0
S	U3XA1X	BRAKE, FRONT	CAST IRON	0	0
S	U0AA1X	FRONT BRAKE ADJ. MANUFACTURE	HALDEX - AUTOMATIC	0	0
S	V7AB1X	FRONT BRAKE CHAMBER MFG.	FRONT BRAKE CHAMBER MANUFACTURER, HALDEX	0	0
S	0KXB1X	HUB MATERIAL, FRONT	ALUMINUM	0	0
S	61500A	FRONT AXLE LUBRICANT	FRONT AXLE LUBE, FAG NLGI2 GREASE	0	0
S	1KAA1X	SHOCK ABSORBER, FRONT	DOUBLE ACTING TYPE	0	0
S	245AA2	STEERING	TRW TAS-65 INTEGRAL POWER	78	0
S	IRXC1X	FRONT SUSP MAINTENANCE	MAINTENANCE FREE, RUBBER SPRING EYE BUSHINGS	0	0

				WEIGHT (LB)	
REAR AXLE EQUIPMENT		DESCRIPTION		FRONT	REAR
	2680H8	REAR AXLE	38000# (17200kg) MERITOR MT40-14XHE STD DUTY HOUSING 9.5MM	0	1,356
S	6MAA1X	REAR AXLE CASING WIDTH	W/O WIDE TRACK AXLE	0	0
S	617003	DRIVE AXLE LUBRICANT	DRIVE AXLE LUBE, SHELL 75W90 SYNTHETIC OIL	0	0
S	018AA1	CARRIER - REAR AXLE	VENDOR CARRIER	0	0
	TAXE5X	REAR AXLE RATIO	3.55 RATIO	0	0
S	186AC0	REAR SUSPENSION	MAXLITE 40 EZ (GEN 2) 40,000 lb	0	966
S	GWXBYX	BOGIE SPREAD, REAR	52" AXLE SPACING (BOGIE WHEELBASE)	0	-85
S	ZAXA1X	SUSPENSION LEVELLING DEVICE (CA in PC29 only)	ELECTRICAL REGULATION LEVELING DEVICE	0	3
S	J6DB1X	AIR SUSPENSION DUMP WARNING	AIR SUSPENSION DUMP, SPEED LIMITED, WARNING INDICATOR & BUZZER	0	0
S	YVXA1X	REAR SHOCK ABSORBER	REAR SHOCK ABSORBER	0	27
S	XYXA1X	TRANSVERSE TORQUE RODS, R SUSP	TRANSVERSE TORQUE ROD - ALL AXLES	0	73
S	237037	AUX.SPRING BRAKE QTY	AUX SPRING BRAKE QTY, 4 CHAMBERS	0	20
S	253AC9	BRAKES - REAR	MERITOR "S" CAM - 16.5"x7" Q+ LIGHTWEIGHT BRAKE STAMPED STEEL SPIDERS (Total for QTY = 2)	0	14
S	U4XA1X	BRAKE, DRIVE, REAR	CAST IRON	0	0
S	U1AA1X	REAR BRAKE ADJ MANUFACTURE	HALDEX - AUTOMATIC (Total for QTY = 2)	0	0
	V1AB1X	REAR BRAKE CHAMBER SIZE	REAR SPRING BRAKE CHAMBERS 30/30 TYPE	0	0
	N5FAFX	BRAKE ORI REAR-MOST DRIVE AXLE	DRUM BRAKE CHAMBER ORIENTATION: Middle Mount - Forward of Axle - Chamber Up	0	0
S	300AS0	PARKING BRAKE CHAMBER	HALDEX "GOLD SEAL PLUS" (3" STROKE) BRAKE CHAMBERS (Total for QTY = 2)	0	0
S	0LXI1X	HUB MATERIAL, DRIVE	ALUMINUM PRESET REAR HUB W/INTEGRATED SPINDLE NUT	0	212

PRICELIST DATE

20230205

QUOTATION

BLAN2022000174C626

DATE

4/20/2023

PAGE

3 of 12

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
REAR AXLE EQUIPMENT		DESCRIPTION		FRONT	REAR
S	3LAC1X	POWER DIVIDER LOCKOUT	POWER DIVIDER LOCKOUT, W/BUZZER & LIGHT	0	40
S	698098	ANTILOCK BRAKE SYSTEM	MACK ROAD STABILITY ADVANTAGE BENDIX ABS/ATC/ESP W/YAW CONTROL 4S4M	7	0
S	URXD1X	BRAKE VALVE VERSION	BENDIX SWITCHES AND VALVES WHERE POSSIBLE	0	0
S	3ZAA1X	SPRING BRAKE INVERSION VALVE	TRACTOR SPRING BRAKE INVERSION VALVE	5	0

				WEIGHT (LB)	
PUSHER/TAG AXLE EQUIPMENT		DESCRIPTION		FRONT	REAR
S	MA2052	AUXILIARY AXLES (x)	(1) HENDRICKSON 13K COMPOSILITE STEERABLE PUSHER AXLE (LIFTABLE), FF-SERIES WHEEL ENDS	373	856
S	MA7087	FIRST AUXILIARY AXLE SPACING	48" (1220mm) 1st AUX AXLE SPACING	0	0
S	0NXD1X	HUB MATERIAL, TRAILING	ALUMINUM PRESET HUB, TRAILING W/ INTEGRATED SPINDLE NUT	0	0
S	618004	PUSHER AXLE LUBRICANT	PUSHER AXLE LUBE, CENEX 80W90 MINERAL OIL	0	0
S	MA3093	BRAKES - AUXILIARY AXLE (x)	HENDRICKSON 15X5 CAST AUXILIARY AXLE BRAKES (8x4/10x4 13k)	0	0
S	UFXA1X	TRAIL. AXLE BRAKE DUST SHIELD	DUST SHIELDS FOR AUXILLARY AXLE	0	0
S	MAD07D	BRAKE CHAMBERS MFG - AUXILIARY AXLE	AUXILIARY AXLE BRAKE CHAMBER MANUFACTURER, HALDEX	0	0
S	MAE02E	SLACK ADJUSTER - AUXILIARY AXLE	AUXILIARY AXLE BRAKE ADJUSTMENT, AUTOMATIC HALDEX	0	0
S	MAC09C	AUXILIARY AXLE CONTROLS	MANUAL LIFT AUX AXLE CONTROLS - (BASIC HEIGHT)	0	0
S	9GDB1X	AUX AXLE CTRL VALVE LOCATION	AUXILIARY AXLE CONTROL PRESSURE VALVE LOCATION, RHS	0	0

				WEIGHT (LB)	
FRAME EQUIPMENT/FUEL TANKS		DESCRIPTION		FRONT	REAR
	271244	WHEELBASE	244"	120	120
	374056	AF (OVERHANG)	56"	-4	161
S	MCE08E	FRAME RAILS & LINERS	9.5 x 90 x 300mm - (0.37" x 3.54" x 11.81"); RBM 2,470,000 LB-IN	0	0
S	A0XK1X	FRONT FRAME LENGTH	STANDARD BUMPER POSITION	84	-8
S	281AA2	CROSSMEMBERS	STEEL	0	0
	Q5AC1X	REAR CROSSMEMBER OPTIONS	BOXED AND TAPERED CROSSMEMBER	-17	91
	X6XB2X	REAR FRAME TREATMENT	TAPERED AND FLANGED RAIL ENDS (28 deg.)	0	7
S	69XD3X	MUDFLAP HANGERS, REAR AXLE	BETTS B87 SERIES WITH CONSPICUITY FEATURE (FMVSS 108)	0	27
S	4DXB6X	FRONT BUMPER	AERODYNAMIC, PAINTED, WITH BLACK ACCENT, WITH SPOILER	42	-2
S	4EXF1X	TOWING DEVICE, FRONT	(2) CLEVIS	0	0
S	2RAA1X	FUEL LEVEL SENDER UNIT, LIQUID	BASIC FUEL LEVEL SENDER MOUNTED ON L.H TANK	0	0
	288AB2	FUEL TANK - LH	53 GALLON (200 L) 22" ALUMINUM ROUND	135	56
S	290AA1	FUEL TANK - RH	W/O RH FUEL TANK	0	0
S	JHXB1X	FUEL HOSES, LIQUID	BRAIDED HOSE	5	3
S	8520C2	FUEL FILLER NECK OPTIONS	WITHOUT FILLER NECK SCREEN, WITH NON-LOCKABLE FUEL TANK CAP	0	0
	12AA1X	FUEL LINE OPTIONS, LIQUID	W/O FUEL LINE OPTION	0	0
S	Q2AA1X	CAB INSTEP VERSION	STANDARD 2 STEP CAB ACCESS	0	0
S	223AA3	STEPS (BRIGHT) - FUEL TANK	STANDARD FINISH STEPS AND BRIGHT FINISH STRAPS	0	0

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
AIR/BRAKE	DESCRIPTION			FRONT	REAR
	UWXC1X	AIRTANK DRAIN VALVE	MANUAL (PETCOCK) DRAIN VALVES ON ALL TANKS	0	0
S	U2XB1X	AIRTANK MATERIAL	STEEL AIR TANK PAINTED CHASSIS COLOR	0	0
S	141AA1	RELOCATE AIR RESERVOIRS	W/O RELOCATED AIR TANKS	0	0
S	1JAABX	PARKING BRAKE VALVE	TWO (2) VALVE DUAL BRAKE SYSTEM - TRAILER SUPPLY AND TRACTOR-TRAILER PARK	0	0

				WEIGHT (LB)	
ELECTRICAL	DESCRIPTION			FRONT	REAR
	3120C2	ROOF & SIDE MARKER LIGHTS	(5) TRUCKLITE CHROME BULLET ROOF MARKER & TRUCKLITE SIDE MARKER LAMPS	5	3
S	LJXB1X	HEADLAMP BULB TYPE	HEADLAMP BULB TYPE, LED	0	0
S	LSXJ7X	DAYTIME RUNNING LIGHTS	W/OVERRIDE SWITCH, PARK BRAKE & ENGINE RUNNING ACTIVATED	0	0
S	X2AA1X	DRL OVERRIDE SPEED THRESHOLD	DRL OVERRIDE SPEED THRESHOLD 8 KMPH (5 MPH)	0	0
	NEXC1X	TAIL LAMPS	INCANDESCENT TAIL LAMPS	0	7

				WEIGHT (LB)	
TRAILER CONNECTIONS	DESCRIPTION			FRONT	REAR
	330AD8	FIFTH WHEEL	FIXED - JOST JSK-37USL-DB SERIES, LH RELEASE (AVAIL: 5.87",6.85",7.83",8.86",10.83",11.89")	0	340
	6DXJ1X	5TH WHEEL MOUNTING BRACKETS	STATIONARY 5TH WHEEL MTG, 0" TO 24"OFFSET, 2" SPACING	0	56
S	LIXA1X	FIFTH WHEEL ANGLE MATERIAL	STEEL FIFTH WHEEL ANGLES	0	0
S	9DAABX	5TH WHEEL ANGLE THICKNESS	5TH WHEEL ANGLE, 10MM THICKNESS	0	0
S	6BX5XX	5TH WHEEL OFFSET	50" BOGIESPREAD = -1" OFFSET, 52" BS = 0", 54" BS = 1", 55" BS = 1.5", 4x2 = - 26"	0	0
S	E5BARX	GROUND TO 5TH WHEEL TOP HGT. (CA in PC29 only)	1181MM (46.5") GROUND TO 5TH WHEEL TOP HEIGHT	0	0
	6EXAZX	FIFTH WHEEL LEG-HEIGHT (KAX Result)	149MM (5.85") FIFTH WHEEL LEG-HEIGHT (SELECTED BY KAX)	0	0
S	53XBAX	TRAILER GLAD HAND COUPLINGS	GLAD HAND COUPLINGS - NORTH AMERICAN STD	0	0
S	WGXA1X	TRAILER BRAKE VALVE	HAND CONTROL VALVE FOR TRAILER BRAKES W/ AIR CONNECTIONS OR SERVICE BRAKES W/O AIR CONNECTIONS	0	0
S	WHXQ1X	TRAILER CONNECTION POSITION	TRAILER AIR BRAKE CONNECTIONS, BACK OF CAB	23	14
S	51XD1X	TRAILER BRAKE HOSEHANGER	HOSE TENDER, POGO STICK (CHASSIS MOUNTED)	0	0
S	321021	TRAILER ELECTRICAL RECEPT	SINGLE, 7 PINS STD SAE TYPE, BACK OF CAB	0	0
S	5ZXC1X	TRAILER BRAKE HOSES & CABLES	TRAILER AIR HOSES (12' NON-COILED TYPE)	0	0
S	2UAA1X	TRAILER ELECTRICAL CABLE CONFIG	TRAILER ELECTRICAL CORD (12' NON-COILED TYPE)	0	0
S	3SAA1X	TRAILER CONNECTORS HOLDER	ELECTRICAL PLUG HOLDER (INCLUDES GLAD HAND STORAGE)	0	0

				WEIGHT (LB)	
SPECIALTY EQUIPMENT	DESCRIPTION			FRONT	REAR
S	7VEZ1X	AUXILIARY POWER UNIT	WITHOUT AUXILIARY POWER UNIT	0	0
	MCQ01Q	LANE SUPPORT SYSTEM (LSS)	WITHOUT LANE SUPPORT SYSTEM	0	0
S	2PEZ1X	DATA CAPTURE	WITHOUT DATA CAPTURE	0	0
S	1PAZ1X	CAMERA, SURVEILLANCE	WITHOUT CAMERA	0	0

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
CAB INTERIOR (A THRU G)		DESCRIPTION		FRONT	REAR
S	198048	SPEEDOMETER -&- GAUGES - UNIT(S) OF MEASURE	U.S. UNITS (PREDOMINANT)	0	0
	E1AAAX	GAUGE OIL TEMP-REAR AXLE	REAR AXLE OIL TEMP GAUGE IN DID (DRIVER INFORMATION DISPLAY)	0	0
S	173AA5	AIR CONDITIONING/HEATER	BLEND AIR HVAC W/"ATC" TEMP REGULATION	0	0
S	EEXA1X	CUPHOLDER	CUPHOLDER	0	0
S	I0XAHX	DOME LAMP, INTERIOR	(4) DOME LAMPS - DOOR AND SWITCH ACTIVATED	0	0
S	184AA2	FLOOR COVERING	POLYURETHANE FLOOR MAT WITHOUT REMOVABLE INSERTS	0	0

				WEIGHT (LB)	
CAB INTERIOR (H THRU R)		DESCRIPTION		FRONT	REAR
S	C52082	INSTMNT CLUSTER LANGUAGE	DEFAULT: ENGLISH, SPANISH, FRENCH	0	0
S	20XA1X	KEY TYPES FOR DOORS	ALL CHASSIS KEYED AT RANDOM	0	0
S	13AA1X	DOOR OPENING OPTIONS	W/O ELECTRONIC KEYLESS ENTRY	0	0
S	E3XC1X	FORWARD OVERHEAD STORAGE	COMPARTMENT W/NET	0	0
	174AA1	AUDIO ACCOMMODATION	W/O RADIO OR RADIO ACCOMMODATION PACKAGE	-8	0
S	1WAB1X	POWER LEADS	POWER LEADS (5-WAY BINDING POSTS FOR CB RADIO) IN HEADER CONSOLE	0	0
	5CXAEX	AUDIO SPEAKER LOCATION	SPEAKER LOCATION, BEHIND DOORS, MIDDLE HIGH SIDE PANEL	0	0
S	5JXALX	COM.RADIO PREP KIT (CB)	MOUNTING PLATE AND VELCRO STRAP IN HEADER CONSOLE	0	0
S	21XA1X	AUXILIARY REAR WINDOW	REAR WINDOW (FIXED TYPE)	0	0
S	IFXB1X	REAR WALL STORAGE COMPARTMENT	STORAGE POUCH REAR	5	0

				WEIGHT (LB)	
CAB INTERIOR (S THRU Z)		DESCRIPTION		FRONT	REAR
S	004014	INTERIOR TRIM LEVELS	STANDARD PACKAGE, STEEL GRAY (Package 11A)	0	0
S	196AAA	SEAT - DRIVER'S	MACK-AIR, HIGH BACK, 1 CHAMBER AIR LUMBAR	71	16
S	MAPB2X	SEAT COVERING - DRIVER'S	DRIVER'S SEAT - STEEL GREY VINYL	0	0
	3PXA1X	SEAT ARMREST	INBOARD MOUNTED ARM REST, DRIVER'S SEAT ONLY	3	3
	592082	SEAT BELT(S)	LAP & SHOULDER (DRIVER'S SEAT ONLY)	0	0
S	D8XC1X	SEAT BELT REMINDER	SEAT BELT REMINDER IN INSTRUMENT, WITH AUDIO	0	0
S	2QAA1X	IGNITION TYPE	KEY TYPE	0	0
S	161011	STEERING WHEEL	2 SPOKE URETHANE GRIP, SATIN ALUMINUM SPOKES, WITH SWITCHES	0	0
S	WSXBAX	WINDSHIELD TYPE	TWO PIECE WINDSHIELD	0	0
S	145AA1	CAB GLASS	TINTED WINDSHIELD & SIDE WINDOWS & REAR WINDOW (IF EQUIPPED)	0	0
S	JQXAAX	WASHER RESERVOIR POSITION	W/O WINDSHIELD WASHER OPTION	0	0
S	148AA3	WINDSHIELD WIPERS	2 SPEED ELECTRIC MOTOR W/INTERMITTENT FEATURE	0	0

				WEIGHT (LB)	
CAB - SLEEPER BOX		DESCRIPTION		FRONT	REAR
S	4ZXZ1X	REFRIGERATOR	W/O SLEEPER BOX REFRIGERATOR	0	0

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
CAB EXTERIOR		DESCRIPTION		FRONT	REAR
S	88AA1X	EMBLEMS OPTION	W/O MISC ORNAMENT CHANGE OPTION	0	0
S	MCY03Y	HOOD LATCH TYPE & FINISH	ROTARY TYPE HOOD LATCH	0	0
S	MCG08G	EXTERIOR TRIM FINISH AND PACKAGES	ANTHEM BOLD BLACK EXTERIOR TRIM PACKAGE	0	0
	400AF0	GRILLE	BLACK FINISH BARS W/BLACK FINISH SURROUND	0	0
S	89AA1X	INSULATION - ENGINE COMPARTMENT	HOOD INSULATION	0	0
S	MCD03D	PASSENGER SIDE VISIBILITY OPTIONS	AUXILIARY WINDOW IN RH DOOR	3	0
S	5870G7	GRAB HANDLES	PREMIUM BLACK EXTERIOR CAB GRAB HANDLE, BLACK GRAB HANDLE RH INTERIOR WINDSHIELD POST	0	0
S	154AA6	HORN - AIR	(1) BLACK TWIN TRUMPET, UNDER CAB MOUNTED	5	0
S	LXXD1X	HORN - ELECTRICAL	DUAL TONE	5	0
	1520A2	MIRRORS - EXTERIOR	AERO MIRROR - BLACK, WIDE ANGLE both sides, W/O LAMPS	0	0

				WEIGHT (LB)	
AERODYNAMIC DEVICES		DESCRIPTION		FRONT	REAR
	159AA1	CAB AERODYNAMIC PACKAGES	WITHOUT CAB AERODYNAMIC DEVICES	0	0
	MCM998	FRONT CHASSIS AERODYNAMIC PACKAGE	WITHOUT FRONT AERODYNAMIC FAIRINGS	0	0

				WEIGHT (LB)	
WHEELS & TIRES		DESCRIPTION		FRONT	REAR
	9007K0	TIRES BRAND/TYPE - FRONT	11R22.5 G BRIDGESTONE R213 ECOPIA (12350 lbs) (Total for QTY = 2)	234	0
	5312D1	WHEELS - FRONT	22.5x8.25 ACCURIDE ACCU-LITE 51487x WHITE POWDER COAT STEEL, 6.60" OFFSET, 5 HAND HOLE (Total for QTY = 2)	137	0
	901601	TIRES BRAND/TYPE - REAR	11R22.5 G BRIDGESTONE M713 ECOPIA (23360 lbs) (DRIVE ONLY) (Total for QTY = 8)	0	971
	3462J6	WHEELS - REAR	22.5x8.25 ACCURIDE ACCU-LITE 51487x WHITE POWDER COAT STEEL, 6.60" OFFSET, 5 HAND HOLE (Total for QTY = 8)	0	547
S	H1EB1X	DRIVE WHEEL STUDS	DRIVE WHEEL STUDS LONGER LENGTH	0	0
S	15XABX	TIRE INFLATION VALVE	STANDARD VALVE STEMS AND CAPS	0	0
	MA50J5	AUXILIARY AXLE TIRES (x)	255/70R22.5 H BRIDGESTONE R250ED (11020 lbs / 20280 lbs) (Total for QTY = 2)	0	203
	MA4274	AUXILIARY AXLE WHEELS (x)	22.5x8.25 ACCURIDE ACCU-LITE 51487x WHITE POWDER COAT STEEL (7,400 LB), 6.60" OFFSET, 5 HAND HOLE (Total for QTY = 2)	0	137
S	MCH03H	FRONT HUB/WHEEL TRIM	WITHOUT FRONT HUB/WHEEL TRIM	0	0
S	MCI03I	REAR HUB/WHEEL TRIM	WITHOUT REAR HUB/WHEEL TRIM (Total for QTY = 2)	0	0
	MCJ03J	PUSHER HUB/WHEEL TRIM	WITHOUT AUXILIARY HUB/WHEEL TRIM	0	0
S	80AA1X	WHEEL NUT & FINISH, FRONT	WHEEL NUT BASIC FINISH, FRONT	0	0
S	3PBA1X	WHEEL NUT FINISH, REAR (CA)	WHEEL NUT BASIC FINISH, REAR	0	0

				WEIGHT (LB)	
COMMUNICATION SYSTEMS		DESCRIPTION		FRONT	REAR
S	3YAA1X	CO-PILOT - DISPLAY FEATURES ACCESS LEVEL	CO-PILOT DISPLAY, DRIVER ACCESS LEVEL 1	0	0
S	M30060	TELEMATIC GATEWAY	TELEMATICS GATEWAY, 4G/LTE AND WLAN SYSTEM WITH DIAGNOSTIC SERVICES	0	0

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
ENGINE ELECTRONICS		DESCRIPTION		FRONT	REAR
S	WOXA1X	OIL PRESSURE, ENGINE SHUTDOWN	OIL PRESSURE, ENGINE SHUTDOWN	0	0
S	WMXA1X	COOLANT TEMP, ENGINE SHUTDOWN	COOLANT TEMP, ENGINE SHUTDOWN	0	0
S	K5XA2X	ENGINE PROTECTION SYSTEM	ENGINE PROTECTION (SHUTDOWN)	0	0
	C7AABX	ENG FAN CNTL, A/C ON, TIME SET	ENG FAN CONTROL, A/C ON, TIME SETTING, 60 SEC	0	0
S	K7XY1X	ENGINE IDLE CONTROL	IDLE CONTROL, 600 RPM	0	0
S	X0AB0X	SMART IDLE ELEVATED IDLE RPM TIME	INCREASE 10 MINUTE MAXIMUM TIME	0	0
S	M3CA1X	IDLE S/D ABS TAMPER CHECK	IDLE SHUTDOWN ABS TAMPER CHECK, ENABLED	0	0
S	B1AZ1X	IDLE S/D WARNING TIME	WITHOUT IDLE S/D WARNING TIME	0	0
S	A8AALX	IDLE S/D IF WARM-UP TEMP	38C DEG (100F), WARM UP TEMP DELAY	0	0
S	A4AAEX	IDLE S/D WARM-UP TIMER	5 MIN. WARM UP TIME DELAY	0	0
S	B0AAAX	IDLE SHUTDOWN IF POWER > LIMIT	ENG IDLE SHUTDOWN TIME OVERRIDDEN IF TORQUE > THAN LIMIT	0	0
S	M4CB1X	IDLE S/D OVERRIDE %ENGINE LOAD	IDLE SHUTDOWN OVERRIDE UPTO 20% ENGINE LOAD THRESHOLD	0	0
S	D2AAFx	AMBIENT TEMP MIN TRESHOLD	AMBIENT TEMP MIN TRESHOLD, 16 DEG C, (60 DEG F)	0	0
S	D3AAEX	AMBIENT TEMP MAX TRESHOLD	AMBIENT TEMP MAX TRESHOLD, 27 DEG C, (80 DEG F)	0	0
S	B3ABAX	EL HD THROTTLE,MAX ROAD SPEED	ELECTRONIC HAND THROTTLE, MAX ROAD SPEED, 16 KMH (10 MPH)	0	0
S	B6ABAX	EL HAND THROTTLE,MAX ENG SPEED	ELECTRONIC HAND THROTTLE, MAX ENGINE SPEED, 1000 RPM	0	0
S	B4ADAX	EL HAND THROTTLE,MIN ENG SPEED	ELECTRONIC HAND THROTTLE, MIN ENGINE SPEED, 700 RPM	0	0

				WEIGHT (LB)	
TRANSMISSION ELECTRONICS		DESCRIPTION		FRONT	REAR
	M08038	ECONO ROLL	ECONO ROLL DISABLE mDRIVE (REQUIRED FOR ALL OTHER TRANSMISSIONS)	0	0
S	779001	TRANSMISSION ELECTRONICS PACKAGE	W/O ELEC TRANS PACKAGE OPTION (all non-Allison transmissions)	0	0
S	MAV01V	TRANSMISSION ELECTRONIC SHIFTING PROPERTIES	W/O ALLISON FUELSENSE 2.0 PROGRAMMING	0	0

				WEIGHT (LB)	
VEHICLE ELECTRONICS		DESCRIPTION		FRONT	REAR
S	JCXE6X	ROAD SPEED LIMITER SETTING	105 KM/H ROAD SPEED LIMITER (65MPH)	0	0
S	Y3CC1X	PEDAL RSL SETTING	101 KM/H PEDAL ROAD SPEED LIMITER (63MPH)	0	0
S	JDXA1X	CRUISE CONTROL	CRUISE CONTROL	0	0
S	JFXLLX	CRUISE CONTROL, MAX SPEED	MAX CRUISE, 105 KPH (65 MPH)	0	0
S	E3AACX	CRUISE CONTROL MIN SPEED	MIN CRUISE, 32 KPH (20 MPH)	0	0
S	E4AAAX	CRUISE RESUME WITH CLUTCH	CRUISE RESUME WITH CLUTCH	0	0
S	E5AACX	ENG BRK ENGAGE IN CRUISE	ENG BRK ENGAGE IN CRUISE, 3 MPH, ABOVE SET SPEED	0	0
S	X2BB1X	ROAD SPEED LIMIT CONTROL TYPE	RSL CONTROL TYPE NORMAL	0	0
	L2CB1X	PDLO ENGAGED VLS	POWER DIVIDER LOCK OUT (PDLO) ROAD SPEED LIMIT 24KMH (15MPH)	0	0
	Q6FZ1X	DIFF LOCK SPEED LIMIT	WITHOUT DIFFERENTIAL LOCK ROAD SPEED LIMIT	0	0
S	W5BA1X	MAXIMUM ENG SPEED AT 0 MPH	1000 MAXIMUM ENGINE SPEED AT 0 MPH	0	0
S	A4BAAX	DETECTION SPEED SENSR TMPRNG	DETECTION OF SPEED SENSOR TAMPERING, ENABLE	0	0
S	8RXAEX	ENG TORQUE LIMIT,SPEED SENSOR	ENG TORQUE LIMITED TO 50%, IF SPEED SENSOR TAMPER DETECTED	0	0
S	X3CB1X	DRIVER ID FUNCTION	DRIVER ID FUNCTION, DISABLED	0	0
S	0PAZ1X	DR PERFORMANCE PARAMETERS	WITHOUT DRIVER PERFORMANCE PARAMETERS	0	0

PRICELIST DATE

20230205

QUOTATION

BLAN2022000174C626

DATE

4/20/2023

PAGE

8 of 12

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
VEHICLE ELECTRONICS		DESCRIPTION		FRONT	REAR
S	G5AAHX	ENGINE OVERSPEED,ALL COND, LOG	ENGINE OVERSPEED, ALL CONDITIONS, TIME LOG IF ABOVE 2200 RPM	0	0
S	G2AAGX	ENGINE OVERSPEED,FUELED, LOG	ENGINE OVERSPEED, FUELED, TIME LOG IF ABOVE 2100 RPM	0	0
S	G4AAUX	VEHICLE OVERSPEED,ALL COND,LOG	VEHICLE OVERSPEED,ALL COND, TIME LOG IF ABOVE 75MPH (121KMH)	0	0
S	G3AAPX	VEHICLE OVERSPEED, FUELED, LOG	VEHICLE OVERSPEED, FUELED, TIME LOG IF ABOVE 70MPH (113KMH)	0	0
S	G1AABX	ENGINE IDLE DELAY TO LOG	ENGINE IDLE DELAY TO START LOG, 2 MIN	0	0
S	W9A01X	PERIODIC TRIP LOG DAY OF MONTH	PERIODIC TRIP LOG, DAY 1 OF THE MONTH	0	0

				WEIGHT (LB)	
PAINT		DESCRIPTION		FRONT	REAR
S	950AC0	PAINT DESIGN	SINGLE COLOR	0	0
S	924014	PAINT TYPE	SOLID PAINT	0	0
	944DR8	PAINT COLOR - FIRST COLOR	WHITE; L0006	0	0
S	945998	PAINT COLOR - SECOND COLOR	NO SECOND TRUCK COLOR PROVIDED; NO COLOR	0	0
S	946998	PAINT COLOR - THIRD COLOR	NO THIRD TRUCK COLOR PROVIDED; NO COLOR	0	0
S	996AA3	PAINT - CAB PAINT SYSTEM	PAINT - CAB, URETHANE CLEAR COAT	0	0
S	MPB944	CAB COLOR	SAME AS FIRST COLOR - CAB	0	0
S	MPD944	HOOD COLOR	SAME AS FIRST COLOR - HOOD	0	0
S	MPC998	SLEEPER ROOF COLOR	WITHOUT SLEEPER ROOF COLOR	0	0
	MPA998	ROOF FAIRING COLOR	WITHOUT ROOF FAIRING	0	0
S	951AA6	CHASSIS RUNNING GEAR	MACK BLACK (URETHANE); P3036	0	0
S	958944	BUMPER	SAME AS FIRST COLOR - BUMPER	0	0
S	959019	FUEL TANK - ***NO INVENTED VARIANTS ALLOWED in the FUEL TANK PAINT FAMILY***	W/O OPTIONAL FUEL TANK PAINT	0	0
S	962032	HUBS & DRUMS-FRONT	SAME AS CHASSIS RUNNING GEAR	0	0
S	963033	HUBS & DRUMS-REAR	SAME AS CHASSIS RUNNING GEAR	0	0

				WEIGHT (LB)	
CALCULATED CODES - KAX		DESCRIPTION		FRONT	REAR
S	9JXA1X	PROPCALC SELECTION	YES, THE ORDER MUST BE CALCULATED	0	0
	D5EA1X	AUTO ROUTING & CLIPPING, CENTER	AUTOMATIC ROUTING & CLIPPING PLACEMENT, CENTER SECTION	0	0

				WEIGHT (LB)	
BASE WARRANTY & PURCHASED COVERAGES		DESCRIPTION		FRONT	REAR
S	898002	VEHICLE WARRANTY TYPE	NORMAL DUTY WARRANTY CLASSIFICATION	0	0
S	M50020	BASIC CHASSIS COVERAGE	NORMAL DUTY STANDARD BASE COVERAGE 12 MONTHS/100,000 MILES (160,934 KM)	0	0
	M8301T	EMISSION - SURCHARGE	EPA (only) for Mack MP7 / MP8 Diesel	0	0
S	M51021	ENGINE WARRANTY	MACK MP7/MP8 BASE ENGINE COVERAGE 24 MONTHS / 250,000 MILES (402,000KM)	0	0
S	M52022	EMISSION COMPONENT COVERAGE	US and CANADA EQUIPPED VEHICLE EMISSION COMPONENTS COVERAGE 60 MONTHS/100,000 MILES (161,000 KM)	0	0
	M54094	TRANSMISSION WARRANTY	36/350K MI: EATON TRANSMISSION STANDARD NORMAL AND HEAVY DUTY COVERAGE	0	0
S	M55055	CARRIER & AXLE HOUSING WARRANTY	STANDARD VENDOR NORMAL / HEAVY DUTY COVERAGE 36 MONTHS/350,000 (563,00 KM)	0	0

TECHNICAL SPECIFICATION *(cont.)*



				WEIGHT (LB)	
BASE WARRANTY & PURCHASED COVERAGES			DESCRIPTION	FRONT	REAR
S	M56026	AIR CONDITIONING WARRANTY	AIR CONDITIONING STANDARD COVERAGE (Sealed System Only) 12 MONTHS UNLIMITED MILEAGE	0	0
S	M57027	CHASSIS TOWING WARRANTY	STANDARD NORMAL / HEAVY DUTY CHASSIS TOWING 90 DAYS OR 5,000 MILES	0	0
S	M58028	ENGINE TOWING WARRANTY	STANDARD MACK ENGINE TOWING COVERAGE 24 MONTHS/250,000 MILES (402,000 KM)	0	0
S	M690F9	GUARDDOG CONNECT BUNDLE	24 MONTH - GUARDDOG CONNECT WITH MACK OTA (with ASIST and Mack OneCall))	0	0
S	M78010	PREPAID API	WITHOUT PREPAID API	0	0

FRONT / REAR AXLE WEIGHTS (LB)


14813	9924
-------	------

TOTAL WEIGHT (LB)

24736

VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY

Description	Sales Code	Dwg Ref	Length	UOM
Front Frame Extension	N/A	FE	0.0	INCHES
Bumper to Front Axle	N/A	BA	52.4	INCHES
Eff. Bumper to Front Axle	N/A	N/A	52.4	INCHES
Wheelbase	N/A	WB	244.5	INCHES
Rear Overhang	N/A	OH	56.5	INCHES
Overall Length	N/A	OL	353.4	INCHES
Bumper to Back of Cab	N/A	BBC	117.9	INCHES
Eff. Bumper to Back of Cab	N/A	EBBC	129.4	INCHES
Eff. Cab to Rear Axle	N/A	ECA	167.5	INCHES
Eff. Front Axle to Back of Cab	N/A	EAC	77.0	INCHES
Eff. Cab to End of Frame	N/A	ECEF	224.0	INCHES
Unladen 5th Wheel Height	E5BARX	5W	46.5	INCHES
Unladen Frame Height	N/A	FH	41.3	INCHES
Cab Height	N/A	CH	73.0	INCHES
Overall Height	N/A	OVH	139.3	INCHES
Driver CG	N/A	DCG	51.2	INCHES
1ST PUSHER AXLE SPACING 1220MM (48")	GYXGCX	PAS	48.0	INCHES
52" AXLE SPACING (BOGIE WHEELBASE)	GWXBYX	BS	52.0	INCHES

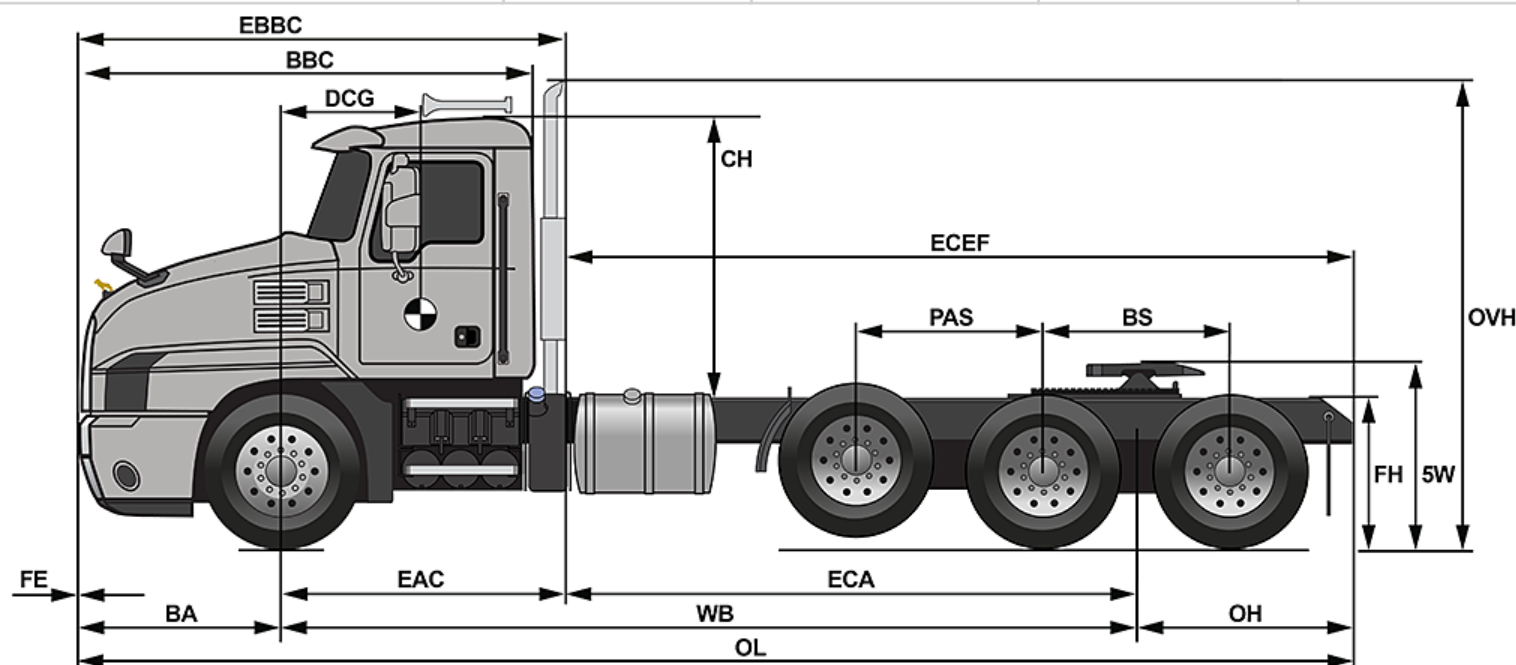

VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY				
Description	Sales Code	Dwg Ref	Left Value(in)	Right Value(in)
Wheelbase	N/A	WB	244.5	244.5
Available Rail Space Right	N/A	ARSR	N/A	77.1
Available Rail Space Left	N/A	ARSL	50.1	N/A
Eff. Front Axle to Back of Cab	N/A	REF	77.0	77.0
Front Axle To Fender	CDX25X	N/A	27.0	27.0
Cleartech One Unit	DPF04F	N/A	0.0	48.0
Battery Box	393AC3	N/A	24.0	0.0
53 GALLON (200 L) 22" ALUMINUM ROUND / W/O RH FUEL TANK	288AB2 / 290AA1	N/A	35.0	0.0
Ad-Blue Tank	DF10M1	N/A	16.0	0.0
Drive Tire Radius	901601	N/A	20.9	20.9
First Pusher Axle Spacing	GYXGCX	N/A	48.0	48.0
Pusher Tire Radius	MA50J5	N/A	18.3	18.3

Top View image is intended for illustration purposes only and is not presented to scale. Wheelbase, Axle Spacing and After frame are not shown as specified, but are a representation. Customer Adaptation (CA) options and relocated components are not represented in these images. Most CA options impact the variation of the image, thus an image may not populate. Calculations are approximate to a tolerance of ± 4 inches due to component mounting variation. Certain chassis component options are NOT represented in the Top View image, such as, but not exclusive to, Front Frame Extensions, Fuel Water Separators, Air Dryers, PTOs, Fifth Wheels, Chassis Fairings, Toolboxes, Trailer Connections. For further information on these items and their respective locations on your specification, please refer to the data sheets associated with those items in the configurator.

MACK®



Mack Trucks
www.macktrucks.com