



Florida Sheriff's Association Contract # #FSA20-EQU18.0, Item# 433
Felling® Trailer Model FT-16-2 Deck Over

Base Model	FT-16-2 Deck Over
Deck Length	Main Deck Length 20 ft
Beavertail	5 ft Self Cleaning 5" x 3" Angle Iron Beavertail
Deck Type	White Oak 2" Nom
Ramps, Rear	(2) 5 ft x 20" Self Cleaning 5" x 3" Angle Iron Spring Assist
Approx Deck Height	34" Loaded, 36" Unloaded
Width	102" OD
Tie Downs	(25 ft) Rub Rail & Stake Pockets-Main Deck & Beavertail
Brakes	Electric Dexter FSA (Fwd Self Adj) On All Axles
Axles	(2) 8K Oil Bath Straight
Suspension	Dexter Spring
Tires/Wheels	(4) 215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel
Hitch Length	5 ft Center of Coupler to Headboard, Appx
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, 42,000 lb Plate Mount (5/8" Bolt)
Jack	12K Drop Leg **Side Wind**
Plug	7 Pole RV
Lights	LED Lights (Peterson), with Sealed Wiring Harness (Sealco)
Trailer Color	Black
Stripe Color	White
Standard	2 Steps, 1 on the Standard Hitch and 1 in front of Axles on Roadside
Standard	3/8" Safety Chains, Grade 70
Standard	Document Holder
Standard	Tool Box, with Lockable Cover
Spare Tire	(1) 215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel
Spare Tire, Acc	Spare Tire Mount – Mounted on the /Curb Side of the Hitch Beam
Option	(20) Crossmembers on Center



FELLING TRAILERS, INC.

1525 Main Street South, Sauk Centre, MN 563

Phone: 800-245-2809; FAX: 320-352-5230

Product Sheet

www.felling.com

FT-16-2

Deckover Tags

GVWR LBS:

21,800

GAWR LBS:

16,000


WEIGHT LBS:

5,800

CAPACITY LBS:

16,000

- 10" structural I-Beam main frame
- 4" stacked Jr I-Beam crossmembers approx 18" to 22" on center
- 6" channel side rails turned in

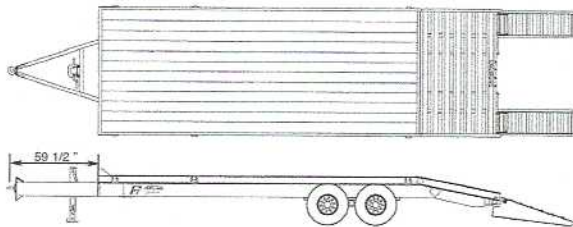

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit	List Price	Add'l Each
Deck Length	Main Deck Length	X	20.00	Feet	0.00	
Beavertail	Self Cleaning 5" x 3" Angle Iron Beavertail	X	5.00	Feet	0.00	
Deck Type	White Oak 2" Nom	X	1.00	Std	0.00	
Ramps; Rear	5' x 20" Self Cleaning 5" X 3" Angle Iron Spring Assist	X	1.00	Pair	0.00	
Appx Deck Height	34" Loaded, 36" Unloaded	X	1.00	Inches	0.00	
Width	102"	X	1.00	Inches	0.00	
Tie Downs	D-Rings, 1" ** Straight **	X	8.00	Each	0.00	
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std	0.00	
Axles	8K Oil Bath Straight	X	2.00	Std	0.00	
Suspension	Dexter Spring	X	1.00	Std	0.00	
Tires & Wheels	215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel (Hercules)	X	4.00	Std	0.00	
Hitch Length	Center of Coupler to Headboard, Appx	X	5.00	Feet	0.00	
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, 42,000 lb Plate Mount	X	1.00	Std	0.00	
Jack	12K Drop Leg ** Side Wind **	X	1.00	Std	0.00	
Plug	7 Pole RV	X	1.00	Std	0.00	
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std	0.00	
Trailer Color	Black	X	1.00	Std	0.00	
Stripe Color	White	X	1.00	Std	0.00	
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std	0.00	
Standard	Document Holder	X	1.00	Std	0.00	
Standard	Tool Box, with Lockable Cover	X	1.00	Std	0.00	