

COLUMNLIFT™ SERIES


The Next Generation BMR



BMR SPECIFICATIONS

The best selling direct lift in North America just got better

- New Optional Bolt-on Design
- New Platform Opening / Closing Mechanism
- Rollers OR Side Pad Configurations
- New Column Impact Guard
- New Main Control Location
- New "Power Down on Demand" Activation
- Mechanical Platform Adjustment
- New Chain Anchor Position
- New Retention Ramp Locking Mechanism
- Flashing platform lights
- MAX GRIP® and Cycle Counter standard
- New Plastic Pump Box and Hydraulic Set-up
- New Battery Box Option with Built-in DC/DC Converter & Resettable Circuit Breaker
- **Galvanized Finish – STANDARD!**

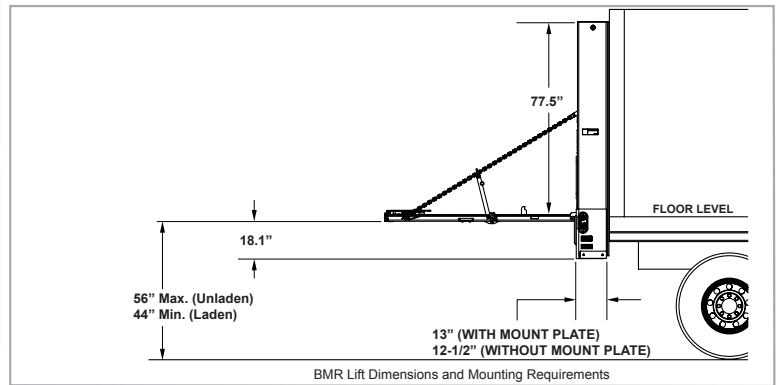

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.

			With 16" Aluminum Retention Ramp (ARR)				
Model	Lifting Capacity		60" x 85" (30"+30")	72" x 85" (36"+36")	84" x 85" (42"+42")	60" x 85" (36"+24")	72" x 85" (42"+30")
Bed Height : Min - Max			44" to 56"	44" to 56"	44" to 56"	44" to 56"	44" to 56"
BMR-35	3,500 lbs.	Approx. Wt.	1,928 lbs.	2,079 lbs.	2,228 lbs.	1,957 lbs.	2,076 lbs.
BMR-44	4,400 lbs.	Approx. Wt.	1,928 lbs.	2,079 lbs.	2,228 lbs.	1,957 lbs.	2,076 lbs.
BMR-55	5,500 lbs.	Approx. Wt.	1,940 lbs.	2,091 lbs.	2,240 lbs.	1,969 lbs.	2,088 lbs.
BMR-66	6,600 lbs.	Approx. Wt.	1,940 lbs.	2,091 lbs.	2,240 lbs.	1,969 lbs.	2,088 lbs.
			With 12" Fixed Ramp		With Single Cart Stop	With Dual Cart Stop	With ACS*
Model	Lifting Capacity		60" x 85" (36"+24")	72" x 85" (42"+30")	60" x 85" (36"+24")	72" x 85" (42"+30")	72" x 85" (42"+30")
Bed Height : Min - Max			44" to 56"	44" to 56"	44" to 56"	44" to 56"	44" to 56"
BMR-35	3,500 lbs.	Approx. Wt.	1,959 lbs.	2,080 lbs.	1,959 lbs.	2,080 lbs.	2,125 lbs.
BMR-44	4,400 lbs.	Approx. Wt.	1,959 lbs.	2,080 lbs.	1,959 lbs.	2,080 lbs.	2,125 lbs.
BMR-55	5,500 lbs.	Approx. Wt.	1,971 lbs.	2,092 lbs.	1,971 lbs.	2,092 lbs.	2,137 lbs.
BMR-66	6,600 lbs.	Approx. Wt.	1,971 lbs.	2,092 lbs.	1,971 lbs.	2,092 lbs.	2,137 lbs.
			With 16" Aluminum Retention Ramp (ARR)				
Model	Lifting Capacity		60" x 85" (30"+30")	72" x 85" (36"+36")	84" x 85" (42"+42")	60" x 85" (36"+24")	72" x 85" (42"+30")
Bed Height : Min - Max			44" to 56"	44" to 56"	44" to 56"	44" to 56"	44" to 56"
BMR-35	3,500 lbs.	Approx. Wt.	1,902 lbs.	2,019 lbs.	2,133 lbs.	1,900 lbs.	2,018 lbs.
BMR-44	4,400 lbs.	Approx. Wt.	1,902 lbs.	2,019 lbs.	2,133 lbs.	1,900 lbs.	2,018 lbs.
BMR-55	5,500 lbs.	Approx. Wt.	1,914 lbs.	2,031 lbs.	2,145 lbs.	1,912 lbs.	2,030 lbs.
BMR-66	6,600 lbs.	Approx. Wt.	1,914 lbs.	2,031 lbs.	2,145 lbs.	1,912 lbs.	2,030 lbs.
			With 16" ARR		With 12" Fixed Ramp	With ACS*	
Model	Lifting Capacity		60" x 85" (30"+30")	72" x 85" (36"+36")	84" x 85" (42"+42")	60" x 85" (36"+24")	72" x 85" (42"+30")
Bed Height : Min - Max			44" to 56"	44" to 56"	44" to 56"	44" to 56"	44" to 56"
BMR-35	3,500 lbs.	Approx. Wt.	1,523 lbs.	1,573 lbs.	1,622 lbs.	1,494 lbs.	1,546 lbs.
BMR-44	4,400 lbs.	Approx. Wt.	1,523 lbs.	1,573 lbs.	1,622 lbs.	1,494 lbs.	1,546 lbs.
BMR-55	5,500 lbs.	Approx. Wt.	1,535 lbs.	1,585 lbs.	1,634 lbs.	1,506 lbs.	1,558 lbs.
BMR-66	6,600 lbs.	Approx. Wt.	1,535 lbs.	1,585 lbs.	1,634 lbs.	1,506 lbs.	1,558 lbs.

* ACS stands for "Automatic Cart Stop"

Note: Weight shown for 102"W weld-on unit. For bolt-on units need to add 122 Lbs. Weights for pump assembly, battery box, frame for pump & battery box mounting, hoses & options are not included.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

COLUMNLIFT™ SERIES




The Next Generation BMR

MAXON®


Optional Features

- Bolt-on
- Rollers or Slide Pads
- Dual Pump & Motor
- Power Down on Demand
- Header Kit
- Dome Light
- Auxiliary Control
- Hand-Held Control
- Conspicuity Tape
- Pressure Gauge

Loadable Platform Space with Cart Stops Deployed

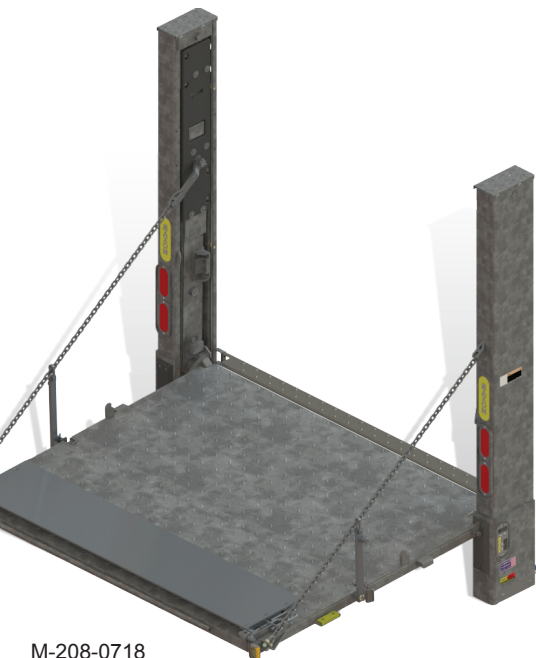


M-208-0718

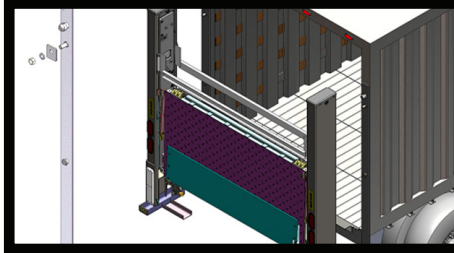


New Optional Bolt-On Design

New bolt-on design concept reduces overall gate depth by 1.75 inches

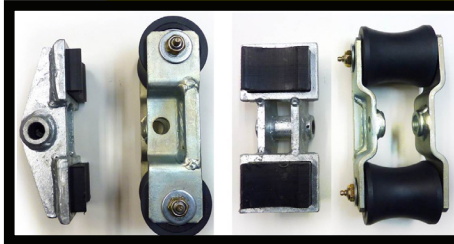

Rollers OR Slide Pads

As an industry first, the BMR is available with rollers or slide pads

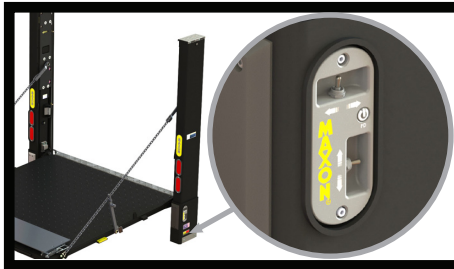


New Switch Location

Control switch is located on the column and now features an optional power down on demand button




New Pump Box / Hydraulic Design / LED Controller

Pump and battery box are mounted on a galvanized bolt-on hanger frame. Master disconnect switch is accessible from front of the pump box. Hydraulic components are mounted on a vertical plate that makes all components easily accessible for service. Controller Quick Diagnostic Built-in LED serve as function indicators

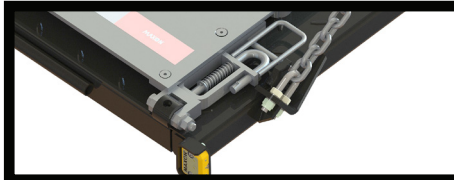

New Retention Ramp Mechanism

The new retention ramp mechanism makes it easy to lock and unlock the ramp and keeps it tightly stowed during transit

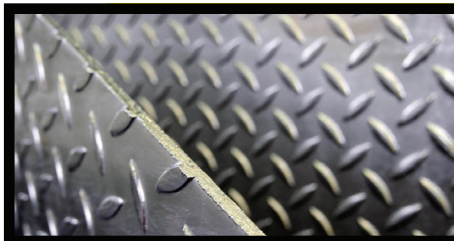

Fully Galvanized - STANDARD

Galvanization is the process by which zinc is coated over corrosive (easily rusted) metals. The process of galvanizing not only protects from corrosion of various 'soft metals' but also adds strength to the original, uncoated metal



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com


GAS BOTTLE SERIES

The BMR-CS Series



BMR-CS SPECIFICATIONS

- New Platform Opening / Closing Mechanism
- Rollers OR Slide Pad Configurations
- New Column Impact Guard
- New Main Control Location
- New "Power Down on Demand" Activation
- New Plastic Pump Box and Hydraulic Set-up
- MAX GRIP® and Cycle Counter standard
- New Battery Box Option with Built-in DC/DC Converter & Resettable Circuit Breaker
- **Galvanized Finish – STANDARD!**

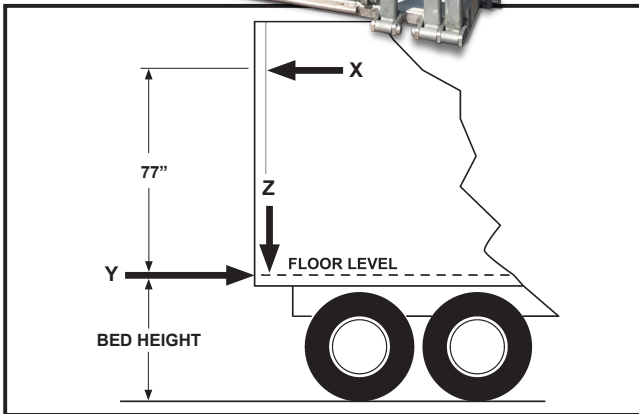

MODEL CAPACITY	P/F SIZE	(X)(Y) LBS.	(Z) LBS.
BMR-CS35 3500 LBS. (GALVANIZED PLATFORM)	36" & 42"	1043	3786
BMR-CS44 4400 LBS. (GLAVANIZED PLATFORM)	36" & 42"	1262	4461

MODEL CAPACITY	P/F SIZE	(X)(Y) LBS.	(Z) LBS.
BMR-CS35 3500 LBS. (ALUMINUM PLATFORM)	36" & 42"	964	3510
BMR-CS44 4400 LBS. (ALUMINUM PLATFORM)	36" & 42"	1183	4185

Lift Dimensions and Mounting Requirements
 NOTE: Maximum operating bed height for body is 56" (Unloaded).
 Minimum bed height is platform width plus 5" (Loaded).

MODEL CAPACITY	OVERALL WEIGHT	PLATFORM LOAD AREA	RETENTION RAMP	BED HEIGHT (For Dock Loading)
Steel Platforms				
BMR-A-CS-35 (3,500 Lbs.)	1763 Lbs. (36 X 80 Platform)	36" x 80" 42" x 80"	18" Aluminum	44" - 56"
	1802 Lbs. (42 x 80 Platform)			
BMR-A-CS-44 (4,400 Lbs.)	1794 Lbs. (36 X 80 Platform)	36" x 80" 42" x 80"	18" Aluminum	44" - 56"
	1833 Lbs. (42 x 80 Platform)			
Aluminum Platforms				
BMR-A-CS-35 (3,500 Lbs.)	1675 Lbs. (36 X 80 Platform)	36" x 80" 42" x 80"	16" Aluminum (36"x80")	44" - 56"
	1712 Lbs. (42 x 80 Platform)			
BMR-A-CS-44 (4,400 Lbs.)	1704 Lbs. (36 X 80 Platform)	36" x 80" 42" x 80"	20" Aluminum (42"x80")	44" - 56"
	1741 Lbs. (42 x 80 Platform)			

PATENT NUMBERS: (367,748), (5,513,943), (5,449,267)

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.




GAS BOTTLE SERIES

The BMR-CS Series

MAXON[®]


Optional Features

- Rollers or Slide Pads
- Dual Pump & Motor
- Power Down on Demand
- Auxiliary Controls System
- Hand-Held Remote Control
- Conspicuity Tape
- Pump Pressure Gauge
- Cab Cut Off Switch

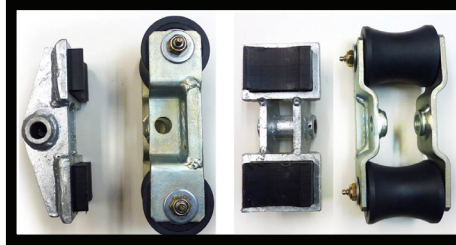


Rollers OR Slide Pads

As an industry first, the BMR is available with rollers or slide pads

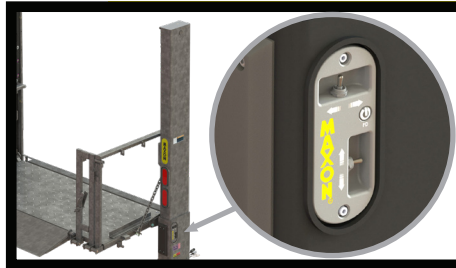

New Switch Location

Control switch is located on the column and now features an optional power down on demand button

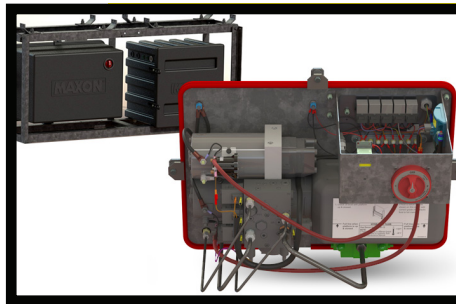

New Pump Box / Hydraulic Design

Pump and battery box are mounted on a galvanized bolt-on hanger frame. Master disconnect switch is accessible from front of the pump box. Hydraulic components are mounted on a vertical plate that makes all components easily accessible for service



Polyethylene Pads

Protect lower column areas from dock impacts

Distributed by:



Fully Galvanized - STANDARD

Galvanization is the process by which zinc is coated over corrosive (easily rusted) metals. The process of galvanizing not only protects from corrosion of various 'soft metals' but also adds strength to the original, uncoated metal

M-214-0420



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com