



THE INDUSTRY STANDARD

The Tommy Gate G2 Series is a dual-cylinder, parallel-arm design which utilizes a pair of hydraulic cylinders to lower and raise the lift by applying direct power to both sides of the platform. G2 Series liftgates for pickups are versatile, popular, and modern.

G2-60-1542 EA38

Shown with optional rubber platform bumpers and discontinued recessed light kit. Recessed lights have been replaced by a bolt-on kit.

Frames and platforms on every G2 Series liftgate are hand assembled and hand welded, while precision parts are laser cut and/or robotically welded.



DUAL-DRIVE ADVANTAGES

Dual-drive liftgates provide increased durability for rigorous cycling and have low maintenance requirements. A paint-before-assembly process also increases the longevity of the lift's aesthetics.

G2 SERIES LIFTGATE FEATURES

- Dual hydraulic cylinders
- Virtually maintenance-free components
- Recessed control
- Larger platforms
- Fully-enclosed hydraulic system located within the lift mainframe



AVAILABLE MODELS



TWO-YEAR STANDARD WARRANTY

	Model Number	Load Area	Taper	Travel	Platform Fold	Application ¹	Gate Weight
1300 lb. Capacity	<u>Treadplate Platforms</u>						
	G2-60-1342 TP27	55 x 27	4	42	No	A,B	438
	G2-60-1342 TP38	55 x 38	4	42	Yes	A,B	478
	G2-60-1342 TP42	55 x 42	7	42	Yes	A,B	503
	<u>TommyTraction™ Platform</u>						
	G2-60-1342 TT27	55 x 27	4	42	No	A,B	439
	<u>Aluminum Platforms</u>						
	G2-60-1342 EA27	55 x 27	6	42	No	A,B	395
	G2-60-1342 EA38	55 x 38	6	42	Yes	A,B	421
	G2-60-1342 EA48 ²	55 x 48	6	42	Yes	A,B	442
1500 lb. Capacity	<u>Bar Grate Platform</u>						
	G2-60-1342 BG27	55 x 27	4	42	No	A,B	445
	<u>Treadplate Platforms</u>						
	G2-60-1542 TP27	55 x 27	4	42	No	B	438
	G2-60-1542 TP38	55 x 38	4	42	Yes	B	478
	G2-60-1542 TP42	55 x 42	7	42	Yes	B	503
	<u>TommyTraction™ Platform</u>						
	G2-60-1542 TT27	55 x 27	4	42	No	B	439
	<u>Aluminum Platforms</u>						
	G2-60-1542 EA27	55 x 27	6	42	No	B	395
750 lb. Capacity	G2-60-1542 EA38	55 x 38	6	42	Yes	B	421
	G2-60-1542 EA48 ²	55 x 48	6	42	Yes	B	442
	<u>Bar Grate Platform</u>						
	G2-60-1542 BG27	55 x 27	4	42	No	B	445
	G2-54-7542 TP38	49 x 38	4	42	Yes	G	421
750 lb. Capacity	<u>Aluminum Platforms</u>						
	G2-54-7542 EA38	50 x 38	6	42	Yes	G	369

G2 MODELS FOR MID-SIZED PICKUPS

G2 SERIES DIMENSIONS ³

1. See applications on page 51.
2. EA48 platform extends 10" above top of liftgate mainframe. See image on page 13.
3. For detailed dimensions, visit www.tommygate.com

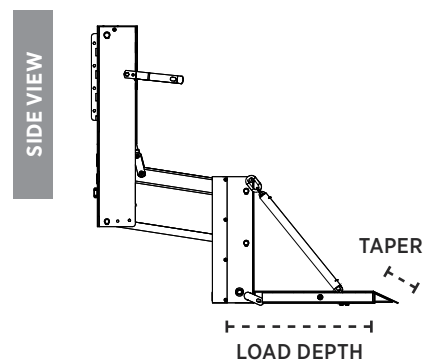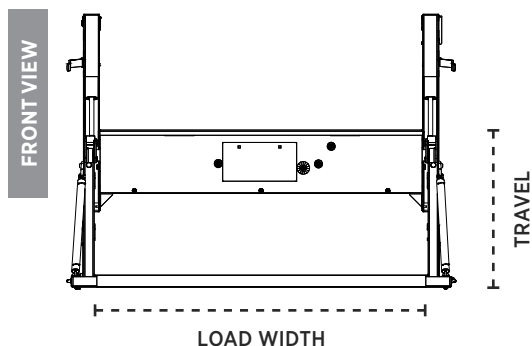

STANDARD FEATURES

	Fixed and Timed Toggle Control
	Recessed Control
	Vehicle-specific Mounting Brackets
	Power Cable with Full-length Ground
	150-amp Circuit Breaker
	Maintenance-free Pins and Bushings
	Drop-away Platform
	Hitch Compatible ¹

AVAILABLE OPTIONS



	Remote Pendant Control
	Dual Controls
	Rubber Platform Bumpers
	Bolt-on, 3-Light, LED Light Kit
	Bolt-on, 2-Light, LED Light Kit
	Galvanized Frame and Platform ³
	Rear Camera and Sensor Bar
	Folding Tire Rack ²

1. Compatible with many hitches. Visit www.tommygate.com to view complete hitch chart.

2. Not compatible with folding platforms. See spec charts.

3. Galvanized option not available with Steel Treadplate platforms. Call factory for ordering details.

PLATFORM MATERIALS

	Steel Treadplate
	Extruded Aluminum
	TommyTraction
	Steel Bargrate

GALVANIZING OPTION


A high-quality galvanized finish supports long-lasting performance and appearance in even the most extreme climate conditions.

*Not available with Steel Treadplate platforms.
Call factory for ordering details.*



STEEL PLATFORMS


TP27 - 27" Loading Depth

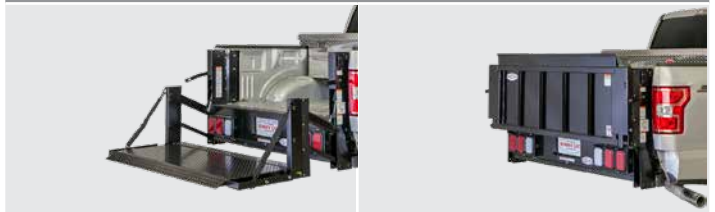

TP38 - 38" Loading Depth



TP42 - 42" Loading Depth

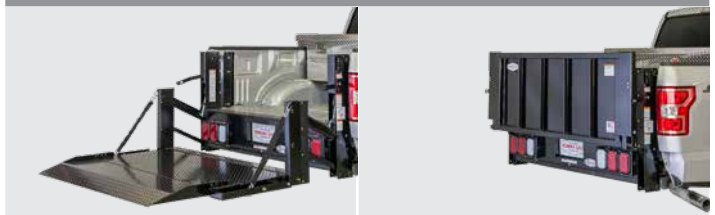

ALUMINUM PLATFORMS

EA27 - 27" Loading Depth



EA38 - 38" Loading Depth



EA48 - 48" Loading Depth (EXTENDS ABOVE TRUCK BOX)



SERVICE BODY

G2 - DUAL DRIVE SERIES



1300 & 1600 LBS CAPACITY



THE INDUSTRY STANDARD

The Tommy Gate G2 Series is a dual-cylinder, parallel-arm design which utilizes a pair of hydraulic cylinders to lower and raise the lift by applying direct power to both sides of the platform. With forty-two inches of vertical travel, the G2 Series is a great fit for most any service body.

G2-60-1542 EA38

Shown with optional rubber platform bumpers and discontinued recessed light kit. Recessed lights have been replaced by a bolt-on kit.

Hydraulic cylinders are built in-house. Precision cylinder welds are executed by robotic machines, while assembly and testing are done by hand.



G2 SERIES LIFTGATE FEATURES

- Dual hydraulic cylinders
- Virtually maintenance-free components
- Recessed control
- Larger platforms
- Fully-enclosed hydraulic system located within the liftgate mainframe



Dual-drive liftgates provide increased durability for rigorous cycling and have low maintenance requirements. A paint-before-assembly process also increases the longevity of the lift's aesthetics.



MODELS FOR SERVICE BODIES WITH 48" OPENING

TWO-YEAR STANDARD WARRANTY



Model Number		Load Area	Taper	Travel	Platform Fold	Gate Weight
1300 lb. Capacity	Treadplate Platforms					
	G2-54-1342 TP27	49 x 27	4	42	No	415
	G2-54-1342 TP38	49 x 38	4	42	Yes	453
	G2-54-1342 TP42	49 x 42	7	42	Yes	477
	TommyTraction™ Platform					
	G2-54-1342 TT27	50 x 27	4	42	No	416
	Aluminum Platforms					
	G2-54-1342 EA27	49 x 27	6	42	No	375
	G2-54-1342 EA38	49 x 38	6	42	Yes	399
	G2-54-1342 EA48 ¹	49 x 48	6	42	Yes	419
	Bar Gate Platform					
	G2-54-1342 BG27	50 x 27	4	42	No	422
1600 lb. Capacity	Treadplate Platforms					
	G2-54-1642 TP27	49 x 27	4	42	No	415
	G2-54-1642 TP38	49 x 38	4	42	Yes	453
	G2-54-1642 TP42	49 x 42	7	42	Yes	477
	TommyTraction™ Platform					
	G2-54-1642 TT27	50 x 27	4	42	No	416
	Aluminum Platforms					
	G2-54-1642 EA27	49 x 27	6	42	No	375
	G2-54-1642 EA38	49 x 38	6	42	Yes	399
	G2-54-1642 EA48 ¹	49 x 48	6	42	Yes	419
	Bar Gate Platform					
	G2-54-1642 BG27	50 x 27	4	42	No	422

ADDITIONAL BODY SIZES

Body Opening	Model	Description
54"	60SB	55" Load Area width

1. See applications on page 51.
2. EA48 platform extends 10" above top of liftgate mainframe. See image on page 19.
3. For detailed dimensions, visit www.tommygate.com

G2 SERIES DIMENSIONS ³

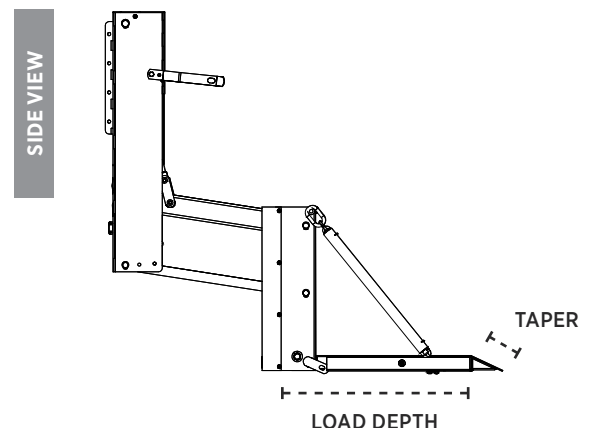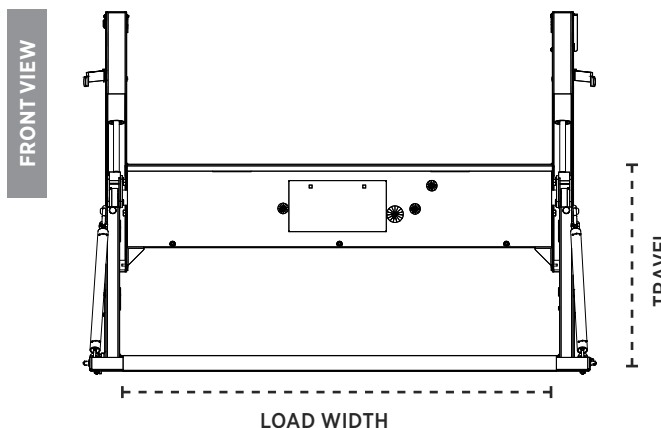

STANDARD FEATURES

	Fixed and Timed Toggle Control
	Recessed Control
	Vehicle-specific Mounting Brackets
	Power Cable with Full-length Ground
	150-amp Circuit Breaker
	Maintenance-free Pins and Bushings
	Drop-away Platform
	Hitch Compatible ¹

AVAILABLE OPTIONS


	Remote Pendant Control
	Dual Controls
	Rubber Platform Bumpers
	Bolt-on, 3-Light, LED Light Kit
	Bolt-on, 2-Light, LED Light Kit
	Folding Tire Rack ²
	Galvanized Frame and Platform ³

PLATFORM DROP-CHAIN COVERS
PROVIDE A QUIETER RIDE.



1. Compatible with many hitches. Visit www.tommygate.com to view complete hitch chart.
2. Not compatible with folding platforms. See spec charts.
3. Galvanized option not available with Steel Treadplate platforms. Call factory for ordering details.

PLATFORM MATERIALS

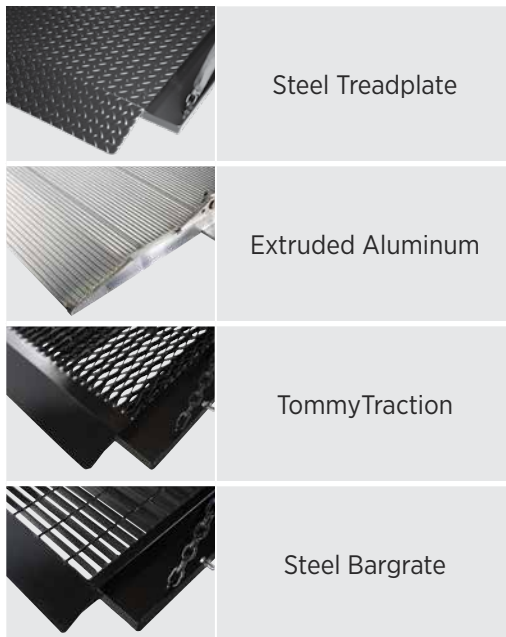

GALVANIZING OPTION

A high-quality galvanized finish supports long-lasting performance and appearance in even the most extreme climate conditions.

*Not available with Steel Treadplate platforms.
Call factory for ordering details.*



STEEL PLATFORMS

TP27 - 27" Loading Depth



TP38 - 38" Loading Depth



ALUMINUM PLATFORMS

EA38 - 38" Loading Depth



EA48 - 48" Loading Depth (EXTENDS ABOVE TRUCK BOX)




ALUMINUM PLATFORMS ARE COMPRISED OF INTERLOCKING, 6061-T6 AIRCRAFT-QUALITY EXTRUSIONS.



FLATBED, STAKE, & VAN BODY

G2 SERIES



1300 - 2000 LBS CAPACITY

MORE THAN A PICKUP LIFT

The Tommy Gate G2 Series is a dual-cylinder, parallel-arm design which utilizes a pair of hydraulic cylinders to lower and raise the lift by applying direct power to both sides of the platform. Supporting larger platforms, G2 Series models are compatible with flatbed, stake and van bodies and offer a wide selection of platform materials to accommodate almost any industry application.

G2-92-1650 TP41

*Shown with discontinued recessed light kit.
Recessed lights have been replaced by bolt-on kits.*




The G2 Series features only two grease points and the hard-chrome pins are virtually maintenance free.

Hydraulic cylinders are built in-house, precision cylinder welds are executed robotically, and assembly and testing are done by hand.



G2 SERIES LIFTGATE FEATURES

- Dual hydraulic cylinders
- Virtually maintenance-free components
- Recessed control
- Hitch compatibility
- Larger platforms
- Fully-enclosed hydraulic system located within the liftgate mainframe

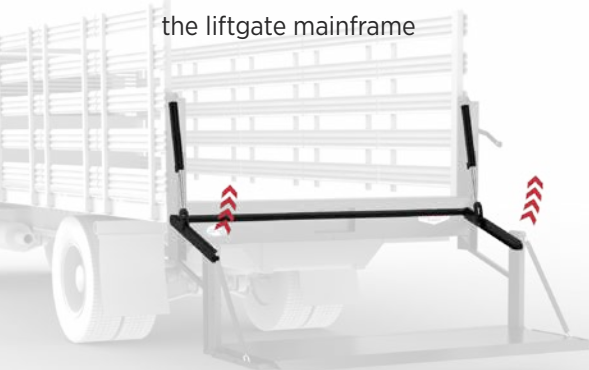

MODELS FOR 96" WIDE BODIES


TWO-YEAR STANDARD WARRANTY

	Model Number	Load Area	Taper	Travel	Platform Fold	Gate Weight
1300 lb. Capacity	<u>Treadplate Platforms</u>					
	G2-92-1350 TP35	87 x 35	6	50	No	628
	G2-92-1350 TP41	87 x 41	6	50	No	655
	<u>TommyTraction™ Platform</u>					
	G2-92-1350 TT33	87 x 33	6	50	No	612
	<u>Aluminum Platforms</u>					
	G2-92-1350 EA37	85 x 37	6	50	No	561
	G2-92-1350 EA41	85 x 41	6	50	No	577
	<u>Bar Grate Platform</u>					
	G2-92-1350 BG33	87 x 33	6	50	No	637
1600 lb. Capacity	<u>Treadplate Platforms</u>					
	G2-92-1650 TP35	87 x 35	6	50	No	628
	G2-92-1650 TP41	87 x 41	6	50	No	655
	<u>TommyTraction™ Platform</u>					
	G2-92-1650 TT33	87 x 33	6	50	No	612
	<u>Aluminum Platforms</u>					
	G2-92-1650 EA37	85 x 37	6	50	No	561
	G2-92-1650 EA41	85 x 41	6	50	No	577
	<u>Bar Grate Platform</u>					
	G2-92-1650 BG33	87 x 33	6	50	No	637
2000 lb. Capacity	<u>Treadplate Platforms</u>					
	G2-92-2050 TP35	87 x 35	6	50	No	644
	G2-92-2050 TP41	87 x 41	6	50	No	680
	<u>Aluminum Platforms</u>					
	G2-92-2050 EA37	85 x 37	6	50	No	563
	G2-92-2050 EA41	85 x 41	6	50	No	577
LOW-PROFILE MODELS						
1600 lb. Capacity	<u>Treadplate Platforms</u>					
	G2-92-1642 TP38	85 x 38	4	42	YES	609
	<u>Aluminum Platforms</u>					
	G2-92-1642 EA38	85 x 38	6	42	YES	523

ADDITIONAL BODY SIZES

Body Size	Model	Load Width
90"	87	80
85"	81	75
80"	73	66
> 67"	65	60

1. For detailed dimensions, visit
www.tommygate.com

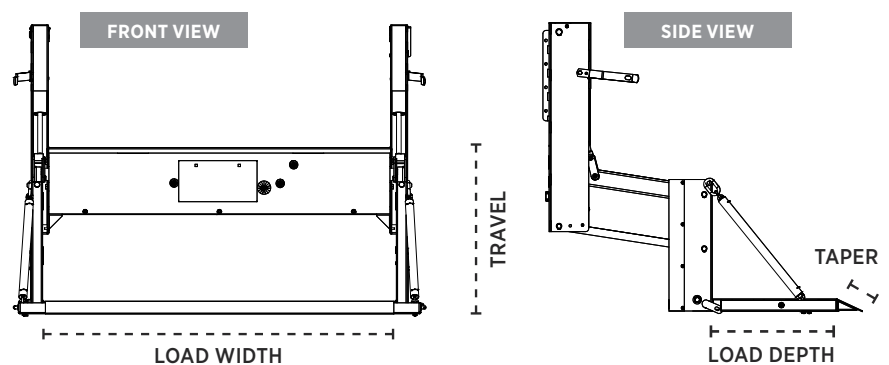G2 SERIES DIMENSIONS ¹

DUMP BODY

G2 SERIES - LIFT-N-DUMP™



1600 LBS CAPACITY



DUMP-THROUGH VERSATILITY

The Tommy Gate G2 Series is a dual-cylinder, parallel-arm design which utilizes a pair of hydraulic cylinders to lower and raise the lift by applying direct power to both sides of the platform. Lift-N-Dump models include all the same features and functions of other G2-Series liftgates, but also offer a unique dump-through capability to be used with dump bodies.

G2-92-1650 LD33

Dual hydraulic cylinders, like all G2 Series models.

Lift-N-Dump models feature pins to lock the platform in place when not in dump-through mode.

Platform latch activates the liftgate's dump-through position.



SPECS

MODELS FOR BODIES WITH 83" - 88" WIDE OPENINGS

TWO-YEAR STANDARD WARRANTY

	Model Number	Load Area	Taper	Platform Fold	Travel	Gate Weight
1600 lb. Capacity	Treadplate Platform G2-92-1650 LD33	83 x 33	6	No	50	682

ADDITIONAL BODY SIZES

Body Openings	Model	Load Width
78" - 83"	87	78
69" - 78"	81	73
64" - 69"	73	64

IMPORTANT

Use of a double-acting hoist is recommended. Using a single-acting hoist requires tie-down clamps.

Dimensions similar to Flatbed, Stake, & Van - G2 Series.