


FT-16-2 DT
DO Dump Trailers
GVWR LBS:
18,400
GAWR LBS:
16,000
WEIGHT LBS:
5,300
CAPACITY LBS:
13,100

- Heavy duty 15 ton scissor hoist
- 7 ga. steel floor
- 20" high 10 ga. sides with stake pockets
- 10X15# I-Beam

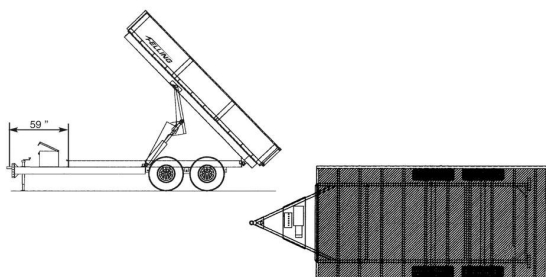

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Main Deck Length	X	14.00	Feet
Deck Type	7 Gauge Floor with 10 Gauge 20" Sides	X	1.00	Std
Ramps, Acc	No Ramps	X	1.00	Std
Appx Deck Height	38" Loaded, 40" Unloaded	X	1.00	Inches
Width	102" OD, 91" ID	X	1.00	Inches
Tie Downs	Stake Pockets	X	10.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	8K Dexter Oil Bath Straight	X	2.00	Std
Suspension	Dexter Spring	X	1.00	Std
Tires & Wheels	215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.00	Feet
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Rear Gate	Barn Door Assembly	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	None	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Heavy Duty Battery, Pump and Remote with 15ft Cord	X	1.00	Std
Standard	12 Volt lead with quick connector for wiring battery to tow vehicle included	X	1.00	Std
GVWR	19,300 lbs	X	1.00	Std