



TECHNICAL SPECIFICATION

MD7 42R

				WEIGHT (LB)	
CUSTOMER/VEHICLE INFO		DESCRIPTION		FRONT	REAR
S	002GI2	CHASSIS (BASE MODEL)	MD742 - 42R MEDIUM DUTY, CLASS 7 w/ 6.7L, (MAX 33,000lbs GVWR)	2,095	552
S	99XE1X	ASSEMBLY PLANT	FACTORY USA (RV, MACK)	0	0
	0051P5	VEHICLE USE & BODY/TRAILER TYPE	DRY VAN, PICK UP & DELIVERY TRUCK	0	0
	0341A2	VEHICLE VOCATION	PICKUP & DELIVERY / SHORT HAUL SERVICE	0	0
S	MP2001	CUSTOMER FLEET SIZE	DEALER FLEET WITH LESS THAN 25 VEHICLES IN OWN FLEET OF ANY VEHICLE BRAND	0	0
S	013001	TYPE OF SERVICE	COMMERCIAL	0	0
S	M98018	WARRANTY REGISTRATION LOCATION	US - WARRANTY REGISTRATION LOCATION	0	0
S	505015	INITIAL REGISTRATION LOCATION	ALL 50 STATES, CARB ENGINE EMISSION (US17 / US21 / ZERO EMISSION)	0	0
S	534014	LANGUAGE-PUBS/DECAL/SIGNS	ENGLISH	0	0
S	032A99	TERRAIN GRADE	CITY, STARTING GRADES<6%	0	0
S	033A20	LOADING SURFACE	ASPHALT LOADING AND / OR UNLOADING SURFACE	0	0
	A19079	VEHICLE MODEL YEAR	2022 MODEL YEAR	0	0

				WEIGHT (LB)	
ENGINE & TRANSMISSION		DESCRIPTION		FRONT	REAR
S	1003G0	ENGINE PACKAGE, COMBUSTION	ISB6.7-220 D CUMMINS 220HP @ 2600RPM (GOV) 600 LB-FT, US21	1,597	-39
S	1361P6	TRANSMISSION	2500 HS 6 SP-ALLISON HIGHWAY SERIES GEN 5 (WITHOUT PTO PROVISIONS)	305	91
S	E7EA1X	FUELSense CALIBRATION	ALLISON FUELSense BASIC, NEUTRAL AT STOP	0	0
S	B1EC1X	TRANSM AUTO NEUTRAL ON P-BRAKE	AUTO NEUTRAL SINGLE INPUT WITH SHIFT SELECTOR OVERRIDE	0	0

				WEIGHT (LB)	
ENGINE & TRANSMISSION EQUIPMENT		DESCRIPTION		FRONT	REAR
	HTXB2X	ENGINE BRAKE TYPE	ENGINE BRAKE	0	0
	JDXA1X	CRUISE CONTROL	CRUISE CONTROL	0	0
S	132AB5	ALTERNATOR	DELCO 12V 145A (24SI) BRUSH-TYPE	0	0

				WEIGHT (LB)	
ENGINE & TRANSMISSION EQUIPMENT		DESCRIPTION		FRONT	REAR
S	NCXD1X	STARTER MOTOR	12 VOLT MELCO STARTER (MITSUBISHI ELECTRIC)	0	0
S	5NXZ1X	ENGINE BLOCK HEATER	WITHOUT ENGINE BLOCK HEATER	0	0
S	TYXZ1X	POWER TAKE OFF CONTROL	WITHOUT POWER TAKE OFF CONTROL	0	0

				WEIGHT (LB)	
AXLE & SUSPENSION		DESCRIPTION		FRONT	REAR
S	2400S0	FRONT AXLE	12,000LB MERITOR MFS+ 5400 KG	1,145	0
S	2440C4	SPRINGS - FRONT	MAC K TAPERLEAF 12300# (5500 KG) GROUND LOAD RATING	0	0
S	2410A1	FRONT AXLE BRAKES	MERITOR "S" CAM TYPE 16.5" x 5" Q+	0	0
S	2520M2	REAR AXLE - SINGLE	21000# (9525 kg) MERITOR MS-21-13X, (W/O DIFF LOCK) CASING 11.0mm	0	1,116
S	260AA5	REAR SUSPENSION - SINGLE	21000# (9525kg) MULTILEAF	0	481
	ZAX99X	SUSPENSION LEVELLING DEVICE	WITHOUT SUSPENSION LEVELLING DEVICE	0	0
S	253AA4	BRAKES - REAR	MERITOR "S" CAM 16.5"x7" Q+	0	0
S	TAXNFX	REAR AXLE RATIO	RATIO 5.57, REAR AXLE	0	0

				WEIGHT (LB)	
CHASSIS EQUIPMENT		DESCRIPTION		FRONT	REAR
S	9KAB1X	IDLE EMISSION CERTIFICATION	IDLE EMISSION CERTIFICATION, CARB 08	0	0
S	DPF05F	DPF DIESEL PARTICULATE FILTER	CUMMINS SINGLE MODULE E.A.T.S. RH SIDE UNDER CAB US17 (7L up to 270HP \ 9L up to 350HP only!!)	64	73
S	130AA9	EXHAUST	UNDERFRAME RIGHT SIDE INBOARD MOUNTED	0	0
S	L3XZ2X	BODY BUILDER MODULE	WITHOUT BODY BUILDER MODULE	0	0
S	M1XZ1X	ELECTRICAL RECEPT, AUX POWER	WITHOUT ELECTRICAL PREPARATION FOR LIFTGATE	0	0

				WEIGHT (LB)	
FRAME EQUIPMENT & FUEL TANKS		DESCRIPTION		FRONT	REAR
	271150	WHEELBASE	150" Wheelbase (87" CA) 50" After-frame	437	375
S	274194	FRAME RAILS	STEEL - 260MM X 70MM X 8MM -- (10.24" X 2.75" X 0.31"); RBM 1,580,000 LB-IN	0	0
S	JVXBAX	PRIMARY FUEL FILTER	FUEL FILTER & WATER SEPARATOR	5	0
S	288AC2	FUEL TANK - LH	50 GALLON (190 L) 22" ALUMINUM ROUND	115	56

				WEIGHT (LB)	
CAB INTERIOR		DESCRIPTION		FRONT	REAR
S	198048	GAUGES - UNIT OF MEASURE	U.S. UNITS (PREDOMINANT)	0	0
S	5RXZ1X	BACK-UP ALARM	WITHOUT BACK-UP ALARM	0	0
S	PVXA2X	AIR RESTRICTION INDICATOR	MECHANICAL, GRADUATED, ON FILTER	0	0
S	LSXH1X	DAYTIME RUNNING LIGHTS	DRL WHEN ENGINE RUNNING & PARK BRAKE OFF	0	0
S	40XAKX	FIRE EXTINGUISHER	HAND FIRE EXTINGUISHER 1.1 KG (2.5LB) ENGLISH DECAL, ABC	0	0
	F8XAVX	AUDIO SYSTEM	RADIO, AM/FM, MP3, WEATHER BAND	0	0
S	5EAA1X	AUDIO INTEGRAT. PHONE HANDSFRE	AUDIO INTEGRATED HANDSFREE PHONE, BLUETOOTH	0	0
S	5FAA1X	AUDIO COMMUNICATION CONNECTOR	AUDIO COMMUNICATION CONNECTOR, USB AUDIO	0	0
S	D6XS1X	COMMUNICATION EQUIPMENT	FACTORY INSTALLED GEOTAB FLEET MANAGEMENT SYSTEM	0	0

				WEIGHT (LB)	
CAB INTERIOR		DESCRIPTION		FRONT	REAR
S	3ZXG2X	DRIVER SEAT SUPPORT	MACK DRIVERS SEAT, AIR SUSPENDED	0	0
S	U3CA1X	DRIVERS SEAT UPHOLSTERY	DRIVERS SEAT UPHOLSTERY, VINYL	0	0
S	34XB1X	PASSENGER SEAT SUPPORT	FIXED PASSENGER SEAT	29	0
S	U4CA1X	PASSENGERS SEAT UPHOLSTRY	PASSENGERS SEAT UPHOLSTERY, VINYL	0	0

				WEIGHT (LB)	
CAB EXTERIOR		DESCRIPTION		FRONT	REAR
S	1520H2	MIRRORS - EXTERIOR	STANDARD MANUAL MIRROR BOTH SIDES, BLACK (Anthem mirror)	27	0
S	3GXZ1X	EXTERIOR MIRROR FEATURES	STANDARD MIRROR	25	0

				WEIGHT (LB)	
WHEELS & TIRES		DESCRIPTION		FRONT	REAR
S	900AS0	TIRES BRAND/TYRE - FRONT	11R22.5 G BRIDGESTONE R268 ECOPIA (12350 lbs) (Total for QTY = 2)	243	0
	4WCC1X	GHG STEER TIRE CATEGORY (PAWS)	GHG STEER TIRE CATEGORY, LOW ROLLING RESISTANCE	0	0
S	5310Y1	WHEELS - FRONT	22.5x8.25 ACCURIDE, POWDER COATED WHITE STEEL DISC (Total for QTY = 2)	128	0
	FWT002	FRONT AXLE TIRE & WHEEL QUANTITY	TWO FRONT TIRES & WHEELS	0	0
S	901AX1	TIRES BRAND/TYRE - REAR	11R22.5 G BRIDGESTONE R268 ECOPIA (23360 lbs) (ALL POSITION) (Total for QTY = 4)	0	486
	4XCC1X	GHG DRIVE TIRE CATEGORY (PAWS)	GHG DRIVE TIRE CATEGORY, LOW ROLLING RESISTANCE	0	0
S	346176	WHEELS - REAR	22.5x8.25 ACCURIDE, POWDER COATED WHITE STEEL DISC (Total for QTY = 4)	0	256
	RWT004	REAR AXLE TIRE & WHEEL QUANTITY	FOUR REAR AXLE TIRES & WHEELS	0	0


				WEIGHT (LB)	
PAINT		DESCRIPTION		FRONT	REAR
S	944CQ2	PAINT COLOR - FIRST COLOR	GLACIER WHITE; P3029	0	0

				WEIGHT (LB)	
BASE WARRANTY & PURCHASED COVERAGES		DESCRIPTION		FRONT	REAR
S	M58038	ENGINE TOWING WARRANTY	CUMMINS ENGINES (Contact Cummins for Standard Warranty and Extended Coverage Details)	0	0
S	M70100	MACK ONECALL BUNDLE	12 MONTH - ASIST AND MACK ONECALL	0	0
S	898002	VEHICLE WARRANTY TYPE	NORMAL DUTY WARRANTY CLASSIFICATION	0	0
S	M50AQ7	BASIC CHASSIS COVERAGE	CHASSIS PLAN 24 MO/UNLIMITED MI NORMAL DUTY PROTECTION PLAN	0	0
S	M51102	ENGINE WARRANTY	CUMMINS ENGINES B6.7 (Contact Cummins for Standard Warranty and Extended Coverage Details)	0	0
S	M52032	EMISSION COMPONENT COVERAGE	CUMMINS ENGINES (Contact Cummins for Standard Warranty and Extended Coverage Details)	0	0
S	M540B4	TRANSMISSION WARRANTY	ALLISON TRANSMISSIONS (Contact Allison Transmission for standard warranty and extended coverage data	0	0
S	M560V6	AIR CONDITIONING WARRANTY	AIR CONDITIONING STANDARD COVERAGE (Sealed System Only) 24 MONTHS UNLIMITED MILEAGE	0	0
S	M57028	CHASSIS TOWING WARRANTY	STANDARD CHASSIS TOWING 90 DAYS OR 5,000 MILES	0	0
S	M680F5	PARTNERED SERVICES	GEOTAB FOR MACK TRUCKS - 12 MONTH	0	0

FRONT / REAR AXLE WEIGHTS (LB) 6209 3442


VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY

Description	Sales Code	Dwg Ref	Length	UOM
Front Frame Extension	N/A	FE	0.0	INCHES
Bumper to Front Axle	N/A	BA	40.0	INCHES
Wheelbase	N/A	WB	150.2	INCHES
Rear Overhang	N/A	OH	50.0	INCHES
Overall Length	N/A	OL	240.2	INCHES
Bumper to Back of Cab	N/A	BBC	103.0	INCHES
Eff. Bumper to Back of Cab	N/A	EBBC	103.0	INCHES
Eff. Cab to Rear Axle	N/A	ECA	87.2	INCHES
Eff. Front Axle to Back of Cab	N/A	EAC	63.0	INCHES
Eff. Cab to End of Frame	N/A	ECEF	137.2	INCHES
Unladen 5th Wheel Height	001AA3	5W	0.0	INCHES
Unladen Frame Height	N/A	FH	40.5	INCHES
Cab Height	N/A	CH	69.1	INCHES
Overall Height	N/A	OVH	109.6	INCHES
Driver CG	N/A	DCG	59.1	INCHES
Second Front Axle Spacing	001AA3	SFAS	0.0	INCHES

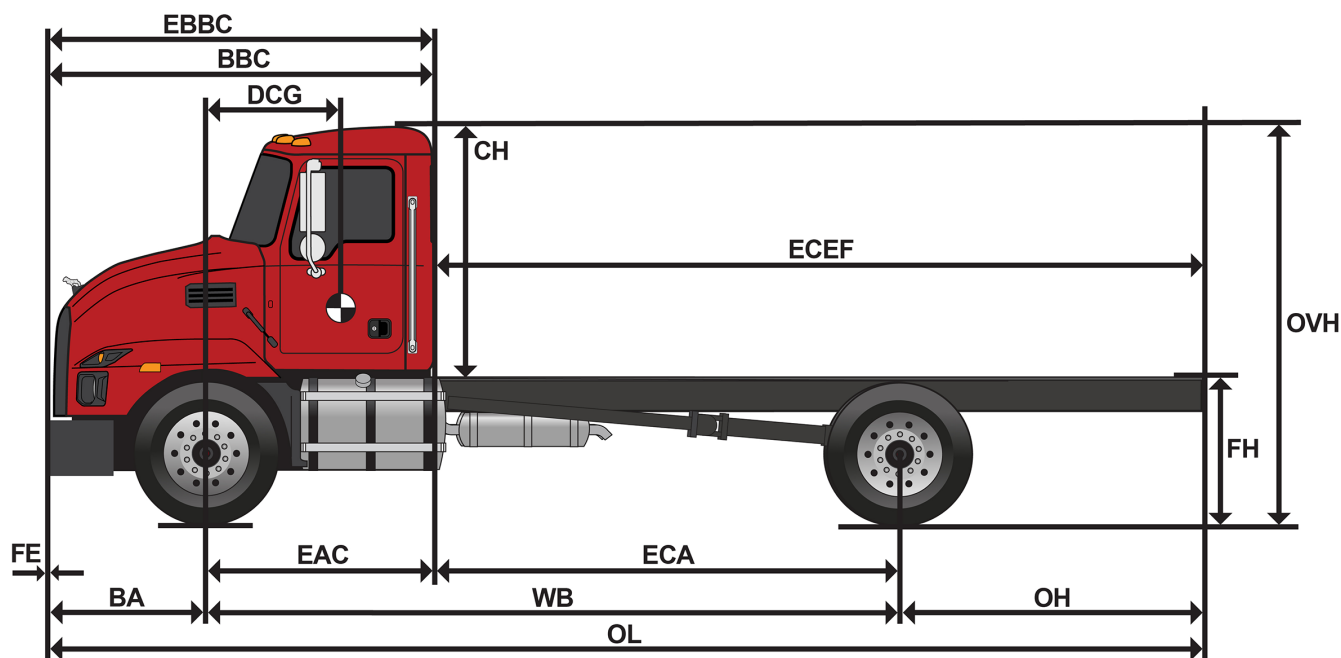

VEHICLE SPECIFICATION/CALCULATED PERFORMANCE SUMMARY

Description	Sales Code	Dwg Ref	Left Value(in)	Right Value(in)
Wheelbase	N/A	WB	150.2	150.2
Available Rail Space Right	N/A	ARSR	N/A	68.5
Available Rail Space Left	N/A	ARSL	58.4	N/A
Eff. Front Axle to Back of Cab	N/A	REF	63.0	63.0
Front Axle To Fender	001AA3	N/A	30.0	30.0
Battery Box	001AA3	N/A	0.0	25.0
50 GALLON (190 L) 22" ALUMINUM ROUND / TRUCK	288AC2 / 001AA3	N/A	41.0	0.0
Ad-Blue Tank	001AA3	N/A	0.0	6.0
Drive Tire Radius	901AX1	N/A	20.7	20.7

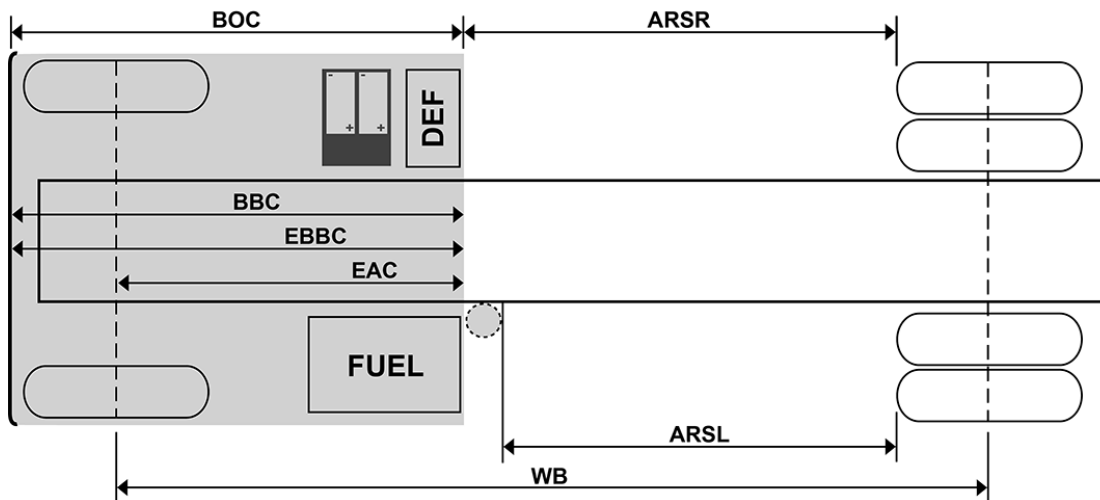

Top View image is intended for illustration purposes only and is not presented to scale. Wheelbase, Axle Spacing and After frame are not shown as specified, but are a representation. Customer Adaptation (CA) options and relocated components are not represented in these images. Most CA options impact the variation of the image, thus an image may not populate. Calculations are approximate to a tolerance of ± 4 inches due to component mounting variation. Certain chassis component options are NOT represented in the Top View image, such as, but not exclusive to, Front Frame Extensions, Fuel Water Separators, Air Dryers, PTOs, Fifth Wheels, Chassis Fairings, Toolboxes, Trailer Connections. For further information on these items and their respective locations on your specification, please refer to the data sheets associated with those items in the configurator.

