
YARDBIRD & SUPER DUTY YARDBIRD DUMP BODIES

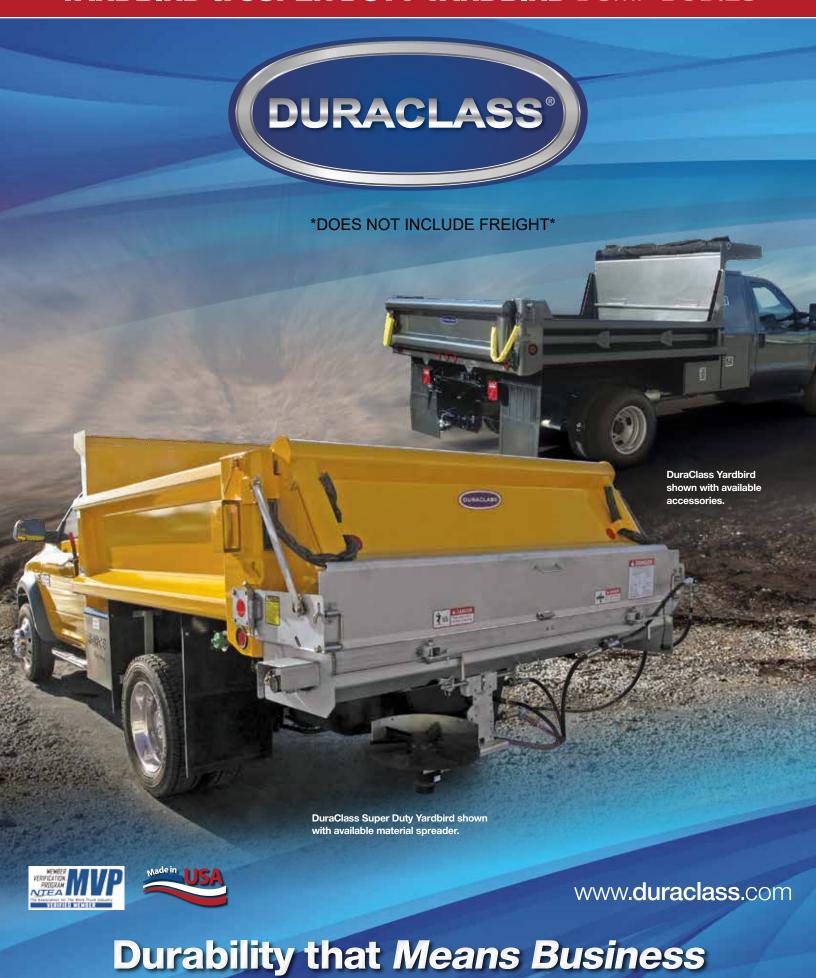

YARDBIR SUPER DUTY

YARDBIRD SPECIFICATIONS Inside Length 8' 1" 101 Width 6'8" 6'8" Material 10 gauge 10 gauge Body Capacity (yards) 2 - 3 2 - 3 Side / Front / Rear Height (inches) 14 / 20 / 20 12 / 18 / 18 Weight, including hoist (lbs) 2002 1700

Durability in a Light Duty Package.

The DuraClass Yardbird and Super Duty Yardbird are the premium light duty choices for contractors and municipalities who don't want to compromise on quality and durability. DuraClass's patented design features a continuous formed body sidewall and fully enclosed top rail, offering superior resistance to moisture and corrosion. Plus, an interlaced understructure and double-wall body side give Yardbirds uncommon strength and rigidity in a light duty dump body.

FEATURES

- Quick release upper tailgate pins
- 1/4 cabshield with window
- Fully welded construction
- 1" diameter tailgate pin
- 5/6" GR43 tailgate chains
- · Chain brackets are banjo eye plates
- · Pipe handle



The Yardbird's heavy-duty platform hinge is greasable.



Stainless Steel Model

1520 HOIST

- Standard on all Yardbirds
- · Powerful 5-inch chrome cylinder
- · Heavy-duty platform hinge
- Double-acting electric or direct mount hydraulics
- · Greaseable fittings
- · Removable cylinder head

AVAILABLE OPTIONS

- Drop Sides
- Crossmemberless Understructure
- · LED Marker Light Kit
- Standard LED STT Light Kit
- ½ Cabshield
- · Stainless Steel

SUPER DUTY YARDBIRD SPECIFICATIONS									
Inside Length	8' 1"	9'	9'	10'	11'	11'			
Width	7'	7'	7'	7'	7'	7'			
Material	10 gauge								
Body Capacity (yards)	3 - 4	2.5 - 3.5	3.5 - 4.5	3 - 4	2.5 - 3.5	3.5 - 4.5			
Side / Front / Rear Height (inches)	18 / 24 / 24	14 / 20 / 20	18 / 24 / 24	14 / 20 / 20	12 / 18 / 18	14 / 20 / 20			
Weight, including hoist (lbs)	1999	1831	2101	2090	2122	2182			

1520 FLM HOIST CAPACITY* (TONS)									
Body Length	8'	9'	10'	11'	12'				
Rear Overhang	6"	6"	6"	6"	6"				
Capacity*	13.5	11.6	10.3	9.3	8.4				

1520 FLM HOIST SPECIFICATIONS

- NTEA Class: 30
- Cylinder Bore: 5"
- GPM (at 1000 RPM): 4
- - Weight: 635 lbs (less oil & PTO)
- Cylinder Stroke: 20"
- Mounting Height: 12 3/4"

*Capacity is based on water-level load and approximately 50° dump angle.

All bodies shown with some optional equipment. Models and options are subject to change without notice.



1425 Highway 25 North Tishomingo, MS 38873 800.255.4345 Fax: 800.728.4345 www.duraclass.com

CONTACT YOUR DISTRIBUTOR

