2023 Isuzu NPR Gas

Virginia Sheriffs' Association Richmond, VA





Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu NPR Gas (2023 NPR Gas Cab Chassis, 1C1 109"WB, 86.5"CA, 12,000 GVWR. White, Standard model specifications with power windows and door locks

	Code	Description	Weight
Model	Coue	Description	weight
WIOGEI	1C1	NPR Gas Cab Chassis 109"WB, 86.5"CA	
	04	White, Standard model specifications with power	
	04	windows and door locks	
Vehicle Application		militario ana abbi locko	
	RQ2	Truck Application	0.0 lbs.
Tires		, , , , , , , , , , , , , , , , , , ,	0.0.30.
	I5H	LRR (low rolling resistance)	0.0 lbs.
Engine			
	L8T	GMPT 6.6L (400 CID) V8 gasoline engine; 350 HP at 4500 RPM; 425 lb-ft torque at 3800 RPM; precise fuel control direct injection technology; electronic throttle control; overhead valves with variable valve timing; heavy duty cast-iron cylinder block with six-bolt main-bearing cap; cast aluminum cylinder heads; forged steel crankshaft; stainless steel	0.0 lbs
Transmission		exhaust manifold.	
Transmission	MANAD	GLOOF Liver Matin 6 appeal outstandin with last we	0.0 11-
	MYD	6L90-E Hydra-Matic, 6-speed automatic with lock-up converter and overdrive. Ratios: Gear and Ratios 4.027, 2.364, 1.532, 1.152, 0.0852, 0.667, Rev. 3.064:1	0.0 lbs
Wheelbase			
	IA8	109 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in RBM 316,800 lb./ft./in. per rail. 86.5"CA	0.0 lbs.
Air Cleaner			
	KNX	Dry paper single element. Air cleaner canister standard with air restriction gauge.	0.0 lbs
Alternator			
	KW7	170 Amp. output with integral regulator.	0.0 lbs
Battery			
	IL3	Single Delco 12-V maintenance free 750 CCA frame mounted battery box	0.0 lbs
Exhaust			
	141	Single horizontal aluminized steel with catalytic converter and oxygen sensor devices.	0.0 lbs
Front Axle			
	ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.	0.0 lbs
Front Suspension			
	ID4	6,830 lb. capacity. Semi-elliptical tapered leaf springs. Includes shock absorbers and stabilizer bar.	0.0 lbs.
Front Wheels			
	RBY	16" X 6", 6-hole disc, painted white.	0.0 lbs
Front Tires			
	153169	215/85R16E (10 ply) tubeless Radial, all season tread.	0.0 lbs

Current report content is based on data as of 2022-04-14 10:50:31. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

Initial:



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu NPR Gas (2023 NPR Gas Cab Chassis, 1C1 109"WB, 86.5"CA, 12,000 GVWR. White, Standard model specifications with power windows and door locks

Selected Model and Opt	ions	
Code	Description	Weight
Rear Suspension		
I8J	12,900 lbs. Capacity semi elliptical; main and auxiliary multi- leaf spring. Includes shock absorbers.	0.0 lbs.
Rear Axle		
ID3	Single-speed, 14,550 lb. capacity with oil lubricated rear wheel bearings.	0.0 lbs.
Ratio		
066	4.100:1	0.0 lbs.
Rear Wheels		
RBZ	16" X 6", 6-hole disc, painted white.	0.0 lbs.
Rear Tires		
153134	215/85R16E (10 ply) tubeless Radial, all season tread.	0.0 lbs.
Fuel Tank		
A17	38.6 gal. rectangular fuel tank. Mounted between frame rail with electric type fuel pump (mounted in tank). Through the rail fuel fill.	0.0 lbs.
Seat		
AQB	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.	0.0 lbs.
Brakes		
IE1	Vacuum + Power Assist; hydraulic 4-wheel disc brakes with 4-channel ABS. Mechanical, transmission mounted parking brake. Non-asbestos semi metallic linings are standard.	0.0 lbs.
Air Conditioning		
C60	Air conditioner	0.0 lbs.
Power Windows & Door Locks		
IL0	Yes	0.0 lbs.
Model Option		
04	White, Standard model specifications with power windows and door locks	0.0 lbs.
Accessories		
IX2 8RP	Rear body dome lamp switch AM/FM/CD radio with Aux input/USB port and Bluetooth RPO	0.1 lbs. 0.0 lbs.

Current report content is based on data as of 2022-04-14 10:50:31. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.


Initial:



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu NPR Gas (2023 NPR Gas Cab Chassis, 1C1 109"WB, 86.5"CA, 12,000 GVWR. White, Standard model specifications with power windows and door locks

Weight Distribution

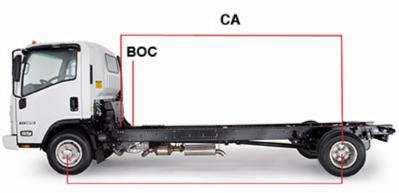

Front Wt.	3,698.00 lbs.	67%
Rear Wt.	1,845.00 lbs.	33%
GVWR	12,000.00 lbs.	
GVW	5,543.00 lbs.	
Remaining Payload Weight	6,457.00 lbs.	

Driver/Passenger Weight	350.0 lbs.
Wheelbase (WB)	109 inches
Cab-to-Axle (CA)	86.5 inches
Body Length	
Body Weight	
Back of Cab (BOC)	7.7 inches

** You must fill in body length and weight to enable body and payload weight calculations.

Weight (lbs.)	Front	Rear	Total
Chassis	3,348.00	1,845.00	5,193.00
Chassis Equipment	0.00	0.00	0.00
Subtotal	3,348.00	1,845.00	5,193.00
Driver/Passengers	350.00	0.00	350.00
Body/Body Equipment	0.00	0.00	0.00
Payload	0.00	0.00	0.00
Total	3,698.00	1,845.00	5,543.00
GAWR/GVWR	4,860.00	8,840.00	12,000.00
GCWR			18,000.00

Chassis Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
04	White, Standard model specifications with power windows and door locks		0.00 lbs.	0.00 lbs.	0.00 lbs.

Driver/Passengers:

	Center of Gravity	Front Axle	Rear Axle	Total	
Driver	front axle	350.00 lbs.	0.00 lbs.	350.0 lbs.	



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu NPR Gas (2023 NPR Gas Cab Chassis, 1C1 109"WB, 86.5"CA, 12,000 GVWR. White, Standard model specifications with power windows and door locks

Warranty

Warranty Limitations: Time or Mileage, Whichever Comes First				
New Truck Warranty	Time in Years	Vehicle Miles		
Basic	3	36,000		
Engine				
Transmission	5	75,000		
Drive Axle	_			
Frame Rails	3	36,000		
Tame Nails	5 *	Unlimited*		
Corrosion (Rust Through)	4	Unlimited		
Doodaida Assistance	3	36,000		
Roadside Assistance	$\mathit{5}^{\dagger}$	75,000 [†]		
Emission Warranty	Time in Years	Vehicle Miles		
Emissions Defect Warranty - Federal	5	50,000		
Emissions Performance Warranty - Federal	5	50,000		
Finincipus Defect Movement (NDD mandel) Coliferatio**	3	50,000		
Emissions Defect Warranty (NPR model) - California**	7	70,000		
Emissions Defect Warranty (NPR-HD model) - California**	5	50,000		
GHG Emission	5	50,000		
Tires	2	24,000		

^{*}After 3 years or 36,000 miles (whichever comes first), labor and parts coverage is 50% for up to 5 years.

The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. Please see your authorized Isuzu dealer for warranty details.

[†]Tows related to powertrain issues may be covered for up to 5 years or 75,000 miles (whichever comes first).

^{**}Please see warranty booklet for coverage details.



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu NPR Gas (2023 NPR Gas Cab Chassis, 1C1 109"WB, 86.5"CA, 12,000 GVWR. White, Standard model specifications with power windows and door locks

Optional Equipmen		
Options		
	Code	Description
	IF6	Fire Extinguisher and Triangle Kit mounted in rear
		organizer on standard cab and under rear seat on
	130	crew cab
	I3G	65 mph top speed limit (max cruise speed 60mph)
	IY4	Delete radio
	IS0 IU2	Heated Mirrors Mirror Procket for 102" wide body
	UZF	Mirror Bracket for 102" wide body
	14K	Back up alarm Keyless entry system including two keypads as
		standard
	I7L	High visibility seat belt (driver seat only)
	I8L	High visibility seat belt (driver and RH passenger seat)
	I1V	Audio System with 7" diagonal color touch screen
	I2V	Audio System with 7" diagonal color touch-screen
		with backup camera (camera shipped loose)
	IOW	Heated dual remote control mirrors (17" head)
	I4V	Forward collision and lane departure warning (Mobileye)
	I4W	Engine block heater with receptacle (115V 400W)
	I3Z	Spare keys (2 additional, 4 keys in total)
	WGW	60 months / 150,000 Miles
	I4Z	Front panel film
	I8T	Chrome Grille
	I2M	Delete cruise control switch
	I6L	LED lighting package
	161	AGM battery (825 CCA x 1)
	IF4	Air Deflector roof mounted (not available in Crew Cab)
	IV8	Seat Covers standard cab
	I1M	Seat covers standard cab with suspension seat
	I6T	Suspension driver's seat
	KV1	Knapheide Utility Van Body, KUVcc, 10.58' x 89" x 90"
	KO1	Knapheide Open Service Body, 127" X 89" X 90"
	I2Y	LED Compartment Lights
	I3Y	Keyless Electric Locking System
	I4Y	Side Mount Ladder Rack
	I5Y	Single Drop-down Ladder Rack
	I6Y	Receiver Hitch & 7-way Trailer Plug
	QK1	Maxon C2 Liftgate - Capacity: 1,300-lbs., Platform: 49-in. (wide) x 38-in. (deep), Ramp: 6-in., Travel: 28-in. to 42-in., Weight: 465
	QK2	Maxon C2 Liftgate - Capacity: 1,300-lbs., Platform: 49-in. (wide) x 38-in. (deep), Ramp: 6-in., Travel: 28-in. to 42-in., Weight: 465
	QK3	Material Rack
	QK4	Keyless Electric Locking System

Current report content is based on data as of 2022-04-14 10:50:31. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

Initial:



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu NPR Gas (2023 NPR Gas Cab Chassis, 1C1 109"WB, 86.5"CA, 12,000 GVWR. White, Standard model specifications with power windows and door locks


Turning Circle	
Specification Summary	
Model	1C104
Front Axle	
ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.
Wheelbase	
IA8	109 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in RBM 316,800 lb./ft./in. per rail.
Front Wheels	
RBY	16" X 6", 6-hole disc, painted white.
Front Tires	
153169	215/85R16E (10 ply) tubeless Radial, all season tread.



Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2023 Isuzu NPR Gas (2023 NPR Gas Cab Chassis, 1C1 109"WB, 86.5"CA, 12,000 GVWR. White, Standard model specifications with power windows and door locks

Turning Circle

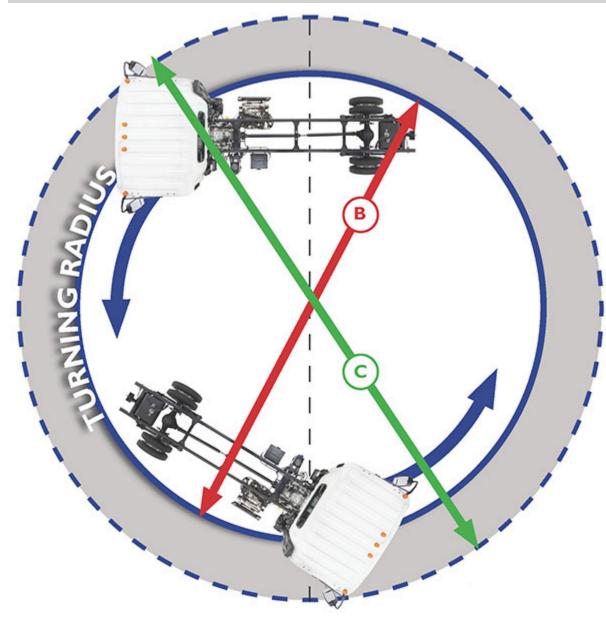

A: Inside Wheel Cut Angle: 42.50°

B: Minimum turning diameter, Curb to Curb: 33.50'
Curb to Curb diameter is measured from the outside of the front tire.

C: Minimum turning diameter, Wall to Wall: 38.80'
Wall to Wall diameter is measured from the outermost part of the cab.