

MAKE	MODEL	PLATFORM	CAPACITY	BASE PRICE
MAXON	GPC17	60X79	1700	\$7,893.00
	GPC17	60X89	1700	\$7,893.00
	GPC22	48X92	2200	\$8,400.00
	GPC22	48X98	2200	\$8,400.00
	GPC22	60X92	2200	\$8,608.00
	GPC22	60X98	2200	\$8,608.00
	GPC22	72X92	2200	\$9,401.00
	GPC22	72X98	2200	\$9,401.00
	GPC33	60X92	3300	\$11,494.00
	GPC33	60X98	3300	\$11,494.00
	GPC33	72X92	3300	\$11,949.00
	GPC33	72X98	3300	\$11,949.00
	GPC33	84X92	3300	\$12,404.00
	GPC33	84X98	3300	\$12,404.00
	GPC44	72X92	4400	\$12,573.00
	GPC44	72X98	4400	\$12,573.00
	GPC44	84X92	4400	\$13,028.00
	GPC44	84X96	4400	\$13,028.00

GPC 33 X4 & 44 X4 Cantilevers





GPC X4 33 Mounting Dimension

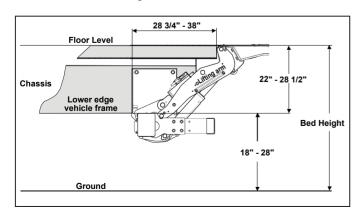

GPC X4 44 Mounting Dimension Please refer to installation manual for specific mounting requirements

GPC 33 X4 & 44 X4 Specifications

The GPC X4 cantilever series maximizes power and stability for heavy load applications

- The patent-pending X4 technology features 2 lifting and 2 tilting cylinders that are stacked above each other. This design optimizes platform stability and leaves more space for light placement
- Aluminum platform is robust and lightweight
- Dual platform cart-stops
- When stowed, the underside of the flat platform surface is ideal for decals
- 0.2" thin, water proof main control panel and hand-held remote control comes standard
- Equipped with service switch, which enables the service mechanic to operate and test all lift functions
- Equipped with grease-free bearings

MODEL CAPACITY	PLATFORM SIZE	STYLE	TOTAL WEIGHT	BED HEIGHT
GPC 33 X4 (3,300 Lbs.)	60" x 92"	Wedge	923 Lbs.	
	60" x 98"		938 Lbs.	40" Min.
	72" x 92"		945 Lbs.	Laden
	72" x 98"		960 Lbs.	51" Max.
	84" x 92"		967 Lbs.	Unladen
	84" x 98"		982 Lbs.	
GPC 44 X4	72" x 92"		1,208 Lbs.	43" Min.
	72" x 98"		1,228 Lbs.	Laden
(4,400 Lbs.)	84" x 92"		1,230 Lbs.	56.5" Max.
	84" x 98"		1,250 Lbs.	Unladen


GPC 33 X4 & 44 X4 Cantilevers

Standard Features

- Aluminum platform
- Platform automatic leveling with soft landing
- Platform warning lights
- Dual cart stops
- Platform ground rollers
- Stainless cylinder rods with nitrate treatment
- Completely sealed flat panel main control
- Hand held control
- Cab cut-off switch

Optional Features

- Full Door Seal Kit
- Flip-Up Door with Seal Kit
- Side Roll Off Guards
- Install Fixture
- 24 Volt Pump/Motor System



Distributed by:



X4 Technology

X4 design technology features 2 lifting and 2 tilting cylinders that are stacked above each other. This design optimizes platform stability and leaves more space for light placement



New Generation Control


The GPC main control is completely sealed and is only 3/16" thick. This design allows placement in many different locations



Lift Switch On	Platform Position	Diagnose LED
No	Closed 90°	Off O
Yes	Closed 90°	On 🔵
Yes	Open > 90°	Off O
Yes	Horizontal 0°	Off O
Yes	Tilted Down 0°-Minus 10°	On 🔵
Yes	Switch On Control Panel	Blink
Yes	Switch On Foot Control	Blink
Yes	Switch On Hand Control	Blink

Control Unit with Built-In Diagnostics

LED lights allow for quick assessment and root cause tracing






M-264-0521

GPC 17 X1 & 22 X1 Cantilevers



Chassis Middle lifting arm axel Ground Bed Height

GPC 17 X1 Mounting Dimension



GPC 22 X1 Mounting Dimension Please refer to installation manual for specific mounting requirements

GPC 17 X1 & 22 X1 Specifications

The GPC X1 cantilever series combines the lowest weight in its class with exceptional durability and low maintenance requirements

- X1 technology simplifies the entire lifting mechanism by eliminating two cylinders. The simple structure means that there is less to maintain over the life of the liftgate
- Standard aluminum platform is robust and lightweight
- Standard dual cart stops and cab power cut off switch
- When stowed, the underside of the flat platform surface is ideal for decals
- Waterproof hand-held remote control
- Equipped with Service Switch, which enables the service mechanic to operate and test all lift functions
- Equipped with grease-free bearings

MODEL CAPACITY	PLATFORM SIZE	STYLE	TOTAL WEIGHT	BED HEIGHT
GPC 17 X1 (1,700 Lbs.)	60" x 79"	389 Lbs. 399 Lbs. 558 Lbs. 568 Lbs. 580 Lbs. 590 Lbs.	389 Lbs.	27.5" Min. Laden
	60" x 89"		399 Lbs.	39.5" Max. Unladen
GPC 22 X1 (2,200 Lbs.)	48" x 92"		558 Lbs.	
	48" x 98"		568 Lbs.	40" Min.
	60" x 92"		Laden	
	60" x 98"		590 Lbs.	51" Max.
	72" x 92"		602 Lbs.	Unladen
	72" x 98"		612 Lbs.	

GPC 17 X1 & 22 X1 Cantilevers

Standard Features

- Platform automatic leveling with soft landing
- Aluminum platform
- Platform warning lights
- Dual cart stops
- Platform ground rollers
- Stainless cylinder rods with nitrate treatment
- Completely sealed flat panel main control
- Hand held control
- Cab cut-off switch

Optional Features

- Full Door Seal Kit
- Flip-Up Door with Seal Kit
- Side Roll Off Guards
- Install Fixture
- 24 Volt Pump/Motor System



Distributed by:



X1 Technology

X1 design technology allows a liftgate to raise and lower full lift capacity utilizing only one cylinder for up and down, and one for tilting. This is accomplished by the underrun bar which connects the lift and tilt arm mechanisms. This eliminates 20% of the total weight of a comparable four cylinder liftgate.



New Generation Control


The GPC main control is completely sealed and is only 3/16" thick. This design allows placement in many different locations



Lift Switch On	Platform Position	Diagnose LED
No	Closed 90°	Off O
Yes	Closed 90°	On 🛑
Yes	Open > 90°	Off O
Yes	Horizontal 0°	Off O
Yes	Tilted Down 0°-Minus 10°	On 🔴
Yes	Switch On Control Panel	Blink (
Yes	Switch On Foot Control	Blink (
Yes	Switch On Hand Control	Blink (

Control Unit with Built-In Diagnostics

LED lights allow for quick assessment and root cause tracing





M-263-1221